



INTRO DUCTION



With over 70 years of expertise Vaal Sanitaryware is chosen by discerning homeowners who consider home improvement an investment in their family and their future, while insisting on timeless quality, durability, comfort and aesthetic appeal.

Vaal Sanitaryware is one of the most widely known and recognisable of all ceramic sanitaryware products on the South African market. Only the best raw materials go into manufacturing Vaal Sanitaryware products, which are expertly moulded and crafted in our Vaal factory. Now 100% owned by LIXIL, we have access to the knowledge, capabilities, product platforms and manufacturing excellence of the biggest and most innovative sanitaryware company in the world. This, combined with a wealth of local industry knowledge, experience and skills, will ensure we continue to make a significant impact in the industry.

I would like to take this opportunity to thank all our customers, who have played an integral role in building our brand and look forward to continuing our success story with you.

Yours sincerely
John Westermeyer
Chief Marketing Officer, LIXIL Africa

ABOUT US

Vaal Sanitaryware has been a go-to brand among South African homeowners and contractors for decades and has been producing ceramic sanitaryware since 1946. Since then, the brand has evolved thanks to its commitment to improvement through quality, human-centred design, reliability and affordability.

Known for its timeless quality, durability, comfort and aesthetic appeal, Vaal is the brand of choice for the most discerning consumers.

Vaal's wide range of basins, toilets and urinals extends beyond domestic use and includes products designed for commercial and industrial cloakrooms, hotels, shopping centres, hospitals and laboratories. Vaal also offers customised solutions to consumer and commercial markets.

OUR EXPERTISE

Technology

Vaal merges the intelligence and precision of German and Japanese technology to produce a range of products that meet world-class quality standards, applying the latest in high-pressure casting, glazing and pressure testing technology to its manufacturing processes. Uncompromising quality control reassures users that their Vaal Sanitaryware products will last a lifetime.

Quality/Certification

Vaal Sanitaryware is known across South Africa and around the world as a brand to be trusted, with its products being one of the most widely known and recognisable of all ceramic sanitaryware products on the market. Only the best raw materials go into manufacturing Vaal Sanitaryware products, which are expertly moulded and crafted in the Vaal factory.

SABS


All Vaal products conform to SABS 497 requirements and align with numerous international standards, including European Norm (EN) standards, assuring customers of its longstanding commitment to reliable quality and safety standards. The factory is also SABS ISO9001 compliant

Vaal also offers comprehensive plumber training facilities to ensure its products are installed correctly every time.

Responsibility

Vaal has conducted extensive research into the field of water-saving, resulting in the development of a 4, 5-litre flushing cistern, 6/3 litre dual-flush cisterns, and Waterless urinals. In this way, Vaal hopes to play its part in helping conserve one of the world's most precious natural resources and make a positive contribution towards helping the water crisis South Africa is currently experiencing.

ORGANISATIONAL TIMELINE

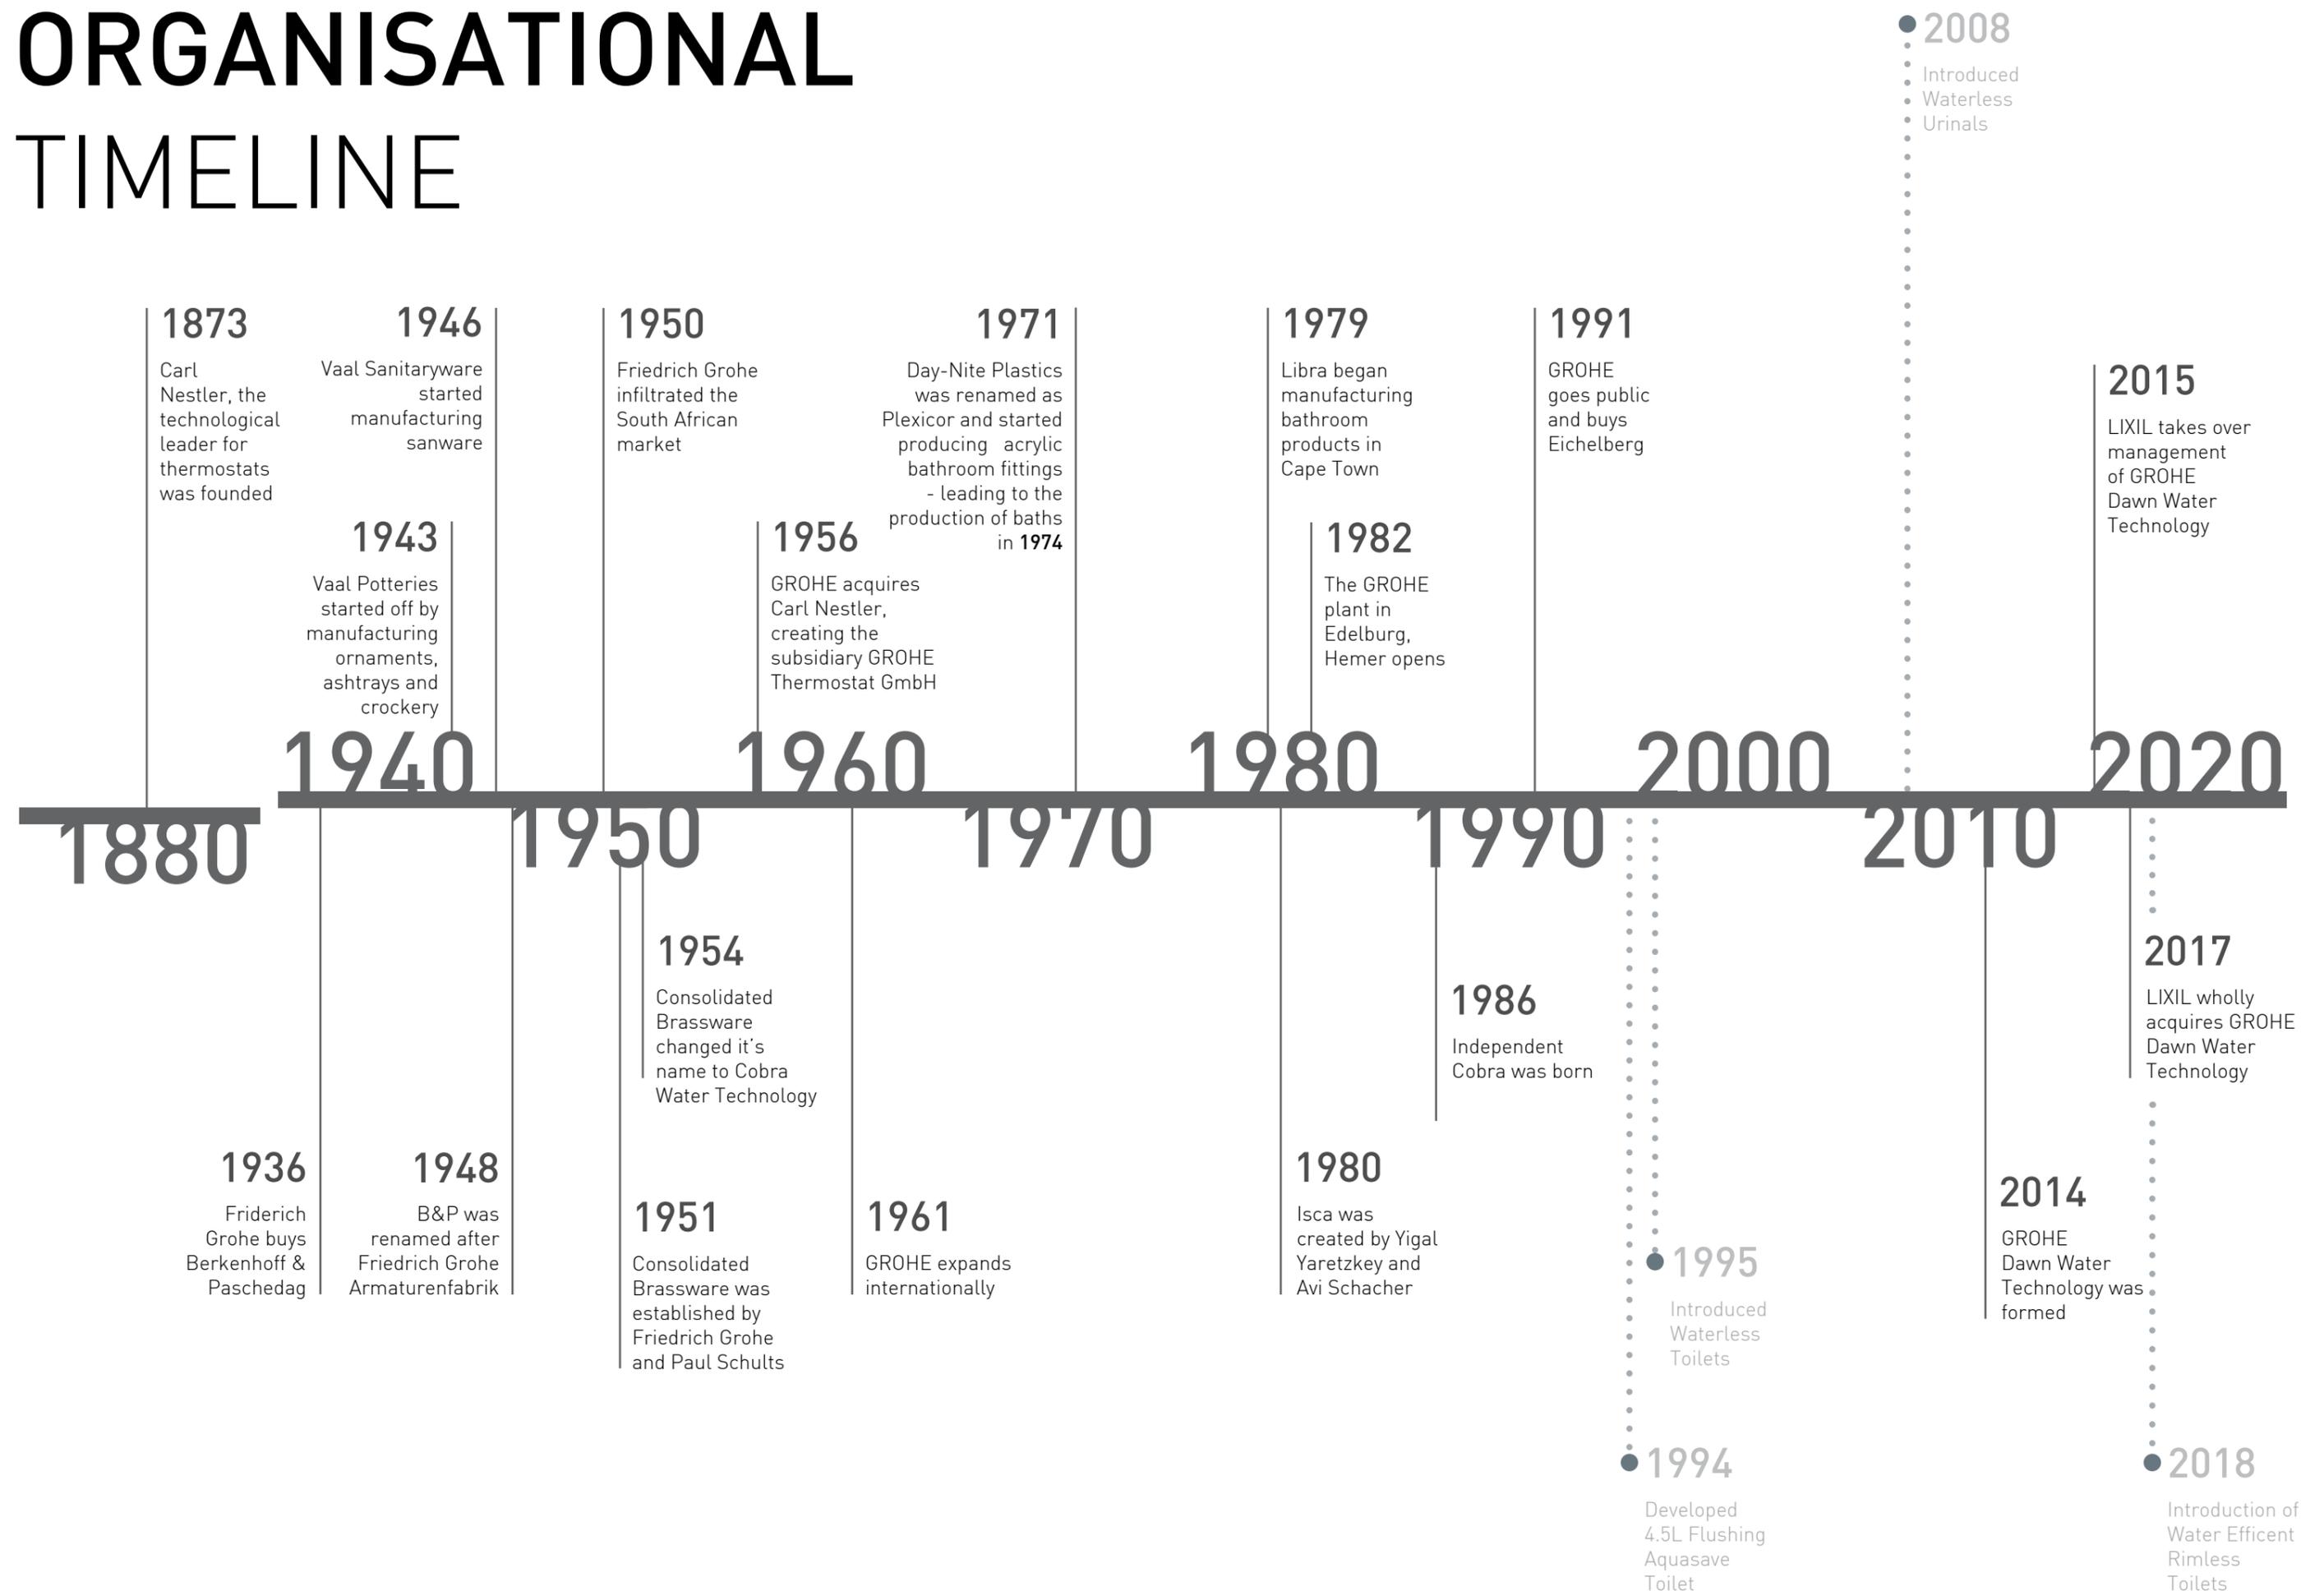

GLOSSARY + GUIDELINE TABLE




Products bearing this mark have met all requirements of the relevant South African National Standards (SANS) standard and have been certified by the South African Bureau of Standards (SABS).




Products bearing this mark were manufactured and/or assembled in manufacturing facilities where the quality management systems have been SABS ISO 9001 certified.

How to read the product catalogue:

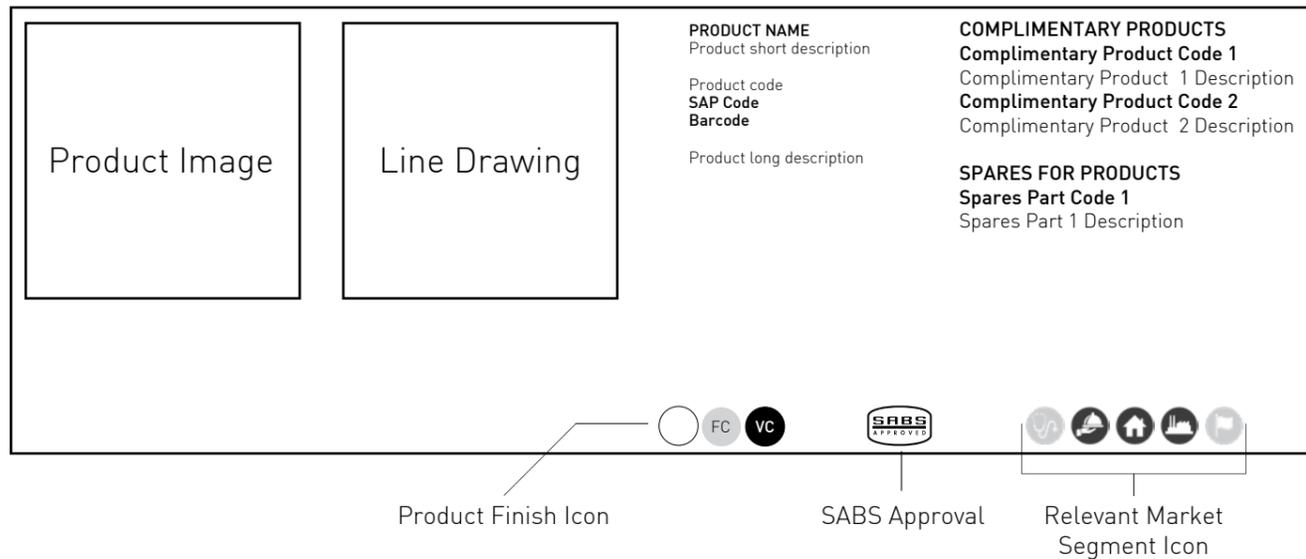

Product Finish:



Material Composition:



Product Market Segments:

Vaal products are produced to satisfy the needs of a variety of market segments or project types. The below shows the various market segments serviced by the Vaal product portfolio.

In the catalogue section of this book, the appropriate market segments attributed to each product are denoted by the relevant icon.



Health Facilities

This segment includes public and private hospitals, clinics, frail care facilities, veterinary hospitals and doctors' rooms.



Residential

This includes high, medium and entry-level housing.



Government

This segment includes the Department of Public Works and Department of Correctional Services; South African Police Services; Departments of Human Settlements, Health, Basic Education; Department of Higher Education and Training; Department of Defence; Department of Rural Development; South African Revenue Services; Department of Sport and Recreation and the Department of Transport.



Hospitality

This segment includes hotels, guest houses, guest lodges, inns, self-catering lodges and convention centres.



Commercial or Industrial

Included in this segment is office buildings, petrol garages, warehouses, factories, shopping centres, shopping malls, retail outlets, sports facilities and distribution centres.

PRODUCT CARE & MAINTENANCE

Basins

Clean the basin with soap and water, as and when required. Should stubborn dirt prevail, a slightly abrasive cleaning material such as "Handy Andy" may be used.

Toilets

Clean the ceramic pan with soap and water, as and when required. Should stubborn dirt prevail, a slightly abrasive cleaning material such as "Handy Andy" may be used. The same applies to a polypropylene or thermoset toilet seat. Should a wooden toilet seat be used, a damp cloth must be used to clean the seat. No abrasive material must ever be used. The inside of the cistern should be kept free of dirt, as it could hamper the performance of the flush valve and the inlet valve. Should either of these valves malfunction, ensure that any dirt has been removed from all of the seals.

Urinals

Clean the urinal with soap and water, as and when required. Should stubborn dirt prevail, a slightly abrasive cleaning material such as "Handy Andy" may be used.

Baths and Shower Trays

Clean the shower tray with soap and water, as and when required. Should stubborn dirt prevail, Brasso may be used.

Maintenance

The frequency and extent of maintenance required for this product varies according to prevailing site and operational conditions. No regular maintenance is required and spare parts are available for key components.

LIXIL Africa Service call centre contact: 0861 21 21 21
LIXIL Africa Service E-Mail: service.africa@lixil.com
Web site: www.lixil.co.za

WARRANTY

LIXIL Africa warrants that their products will be clear of material and manufacturing defects. Appraisal of the above will be done against ruling manufacturing specifications and standards at the date of manufacture. Defective product will be repaired or exchanged at LIXIL Africa's sole discretion. LIXIL Africa shall not be liable for indirect or consequential loss or damage.

THE WARRANTY WILL BE VOIDED UNDER THE FOLLOWING CONDITIONS:

- Products used with water pH falling outside of the guidelines set by the Department Of Water Affairs and Forestry or similar body.
- Products not installed by a registered or accredited installer.
- Products used with, or included in installations where water temperatures are outside of the temperature range stipulated for that product, or as laid down in the Standards for water supply and drainage (SANS 10252 & 10254) or an equivalent international standard.
- Products not installed according to manufacturer's installation instructions or according to valid Water Regulations and general good plumbing practice;
- Products which have failed as a result of dirt or debris in pipe-work which has not been flushed prior to the use of terminal fittings.
- Where a defect is attributable to the incorrect use or incorrect handling of the product;
- Where routine maintenance has been neglected.
- If spare parts other than the original spare parts are used during repairs or maintenance of the product;
- If damage was caused by transport by a third party transporter.
- If the surface of the product has been scratched;
- Products used or intended for display purposes.
- If consumables (e.g. filters, filter cartridges, aerators or batteries) or material subject to wear and tear (such as seals or hoses) are affected;
- If product damage is as a result of chemicals and cleaning agents, lime-scale build-up, aggressive environmental influences, or disruptions resulting in damage which are caused by freezing or lime-scale build-up.
- If the defect is caused by specific environmental circumstances (e.g. excess or negative pressure in the line, excess voltage or under voltage on the line);
- If the defect is attributable to wilful or negligent damage to the product by the user or a third party.

LIXIL Africa reserves the right to review any specific case in order to assess the validity of this warranty. LIXIL Africa may charge a discretionary service fee when called out to inspect products which are not LIXIL products or where there is an illegitimate claim.

THE WARRANTY IS VALID FOR:

- **10 years** Taps & Mixers, Wastes, Capillary- and Compression fittings
- **3 years** Showerheads
- **2 years** Electronic Mixers components and Valves
- **2 years** Valves (Geysers and Toilets)
- **10 years** Cobra-Safe multi-layer pipe system (must be used with Cobra compression fittings and Cobra-Safe inserts or warranty shall be void)
- **10 years** on all baths
- **20 years** on baths with Amazonite coating
- **10 years** on all sanitaryware
- **6 months** on all toilet seats supplied by Vaal Sanitaryware

MISCELLANEOUS:

This warranty shall apply in the above-mentioned scope and subject to the above-mentioned prerequisites. Proof of purchase will be required.

This LIXIL Africa warranty is carried by LIXIL Africa. Please contact our Service Department on 0861 212121 for warranty enquiries or further warranty information.

TABLE OF CONTENTS

01	BASINS	15	03	URINALS	70
	Wall hung and pedestal basins	16			
	Vanity basins	22			
	Pedestals	34			
	Brackets	36			
	Accessories	38			
02	WATER CLOSETS AND BIDETS	40	04	HOSPITAL AND LABORATORY	76
	Close coupled suites	42			
	Semi-close coupled suites	50			
	Bidets	51			
	Low level pans	52			
	Exposed cisterns	56			
	Assisted water closet suites and grab rails	58			
	Wall hung pans	62			
	Back to wall pans	67			

BASINS

01

Wall hung and pedestal basins 16

Amber Classic	17
Bantam	17
Concorde 630	17
Daisy	18
Flamingo	18
Hibiscus	19
Lotus	20
Springbok	20
Tuscany	20
Kite	21
Emerald corner	21
Raven	21

Vanity basins 22

Drop-in:	
Cameo	23
Concorde	23
Concorde Slimline	23
Jade Art	24
Iceberg	24
Zircon Art	24

Counter top:	
Alto Art	26
Emerald	26
Oriele	26
Perla	27
Savannah Design	27
Savoy Design	27
Swift	28
HR Symmetry Rectangular	28

HR Symmetry Square	28
Mini Weaver	29
Midi Weaver	29
Weaver 0TH	29
Weaver 1TH	30


Semi-drop in:	
Azalea 510	30
Azalea 540	30

Under mount:	
Cardinal	32
President	32
Quail	32
Snipe	33
James Butler	33

Pedestals 34

Basin brackets 36

Accessories 38

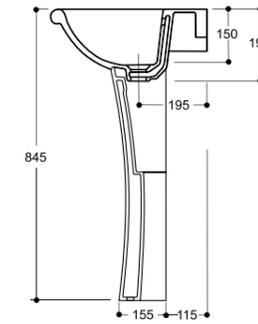

AMBER CLASSIC
WALL HUNG BASIN

700303WH
CAMBAJ31-2C00413
6005826032147

510 x 440mm rounded basin with three semi-punched tapholes, (i.e. available in zero, one, two or three taphole configurations), integrated overflow and chain stay hole through the centre semi-punched taphole.

COMPLIMENTARY PRODUCTS

- 8448Z000**
10mm fixing bolt set
- 715000WH**
Classic Full Pedestal
- 715222WH**
Universal half pedestal

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:


Option 1:
Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure.
NOTE: Do not over tighten.

Option 2:
When installed on a Classic pedestal, place basin on pedestal in correct position, secure basin to the wall, then use silicone sealant or equivalent under pedestal foot and between back of basin and finished wall surface.

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.

SPECIAL RECOMMENDATIONS

Always use silicone sealant or equivalent around basin edges and between basin and finished wall surface area for a secure and neat installation. Wipe off excess sealant and allow to dry.

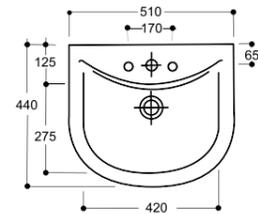

BANTAM
WALL HUNG BASIN

703003WH
CBABAJ21-2C00413
6005826000146

455 x 290mm basin with two semi-punched tapholes (i.e. available in zero, LHS, RHS or two taphole configurations), integrated overflow and chainstay hole.

COMPLIMENTARY PRODUCT



- 8448Z000**
10mm fixing bolt set

INSTALLATION INSTRUCTIONS

The basin is fixed to the wall by using two 10 mm bolts. Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure.
NOTE: Do not over tighten

SPECIAL RECOMMENDATIONS

Always use silicone sealant or equivalent around basin edges and between basin and finished wall surface area for a secure and neat installation. Wipe off excess sealant and allow to dry.

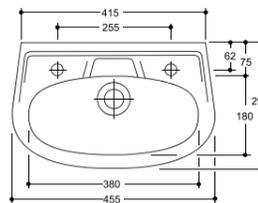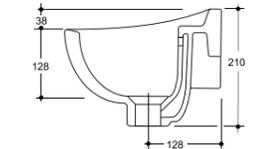

CONCORDE 630
WALL HUNG BASIN

702400WH
CC063J31-2C00413
6005826069099

630 x 500mm rectangular basin with three semi-punched tapholes (i.e. available in zero, one, two or three taphole configurations), integrated overflow, and chainstay hole through the centre semi-punched taphole.

COMPLIMENTARY PRODUCTS

- 8448Z000**
10mm fixing bolt set
- 715000WH**
Classic Full Pedestal
- 715222WH**
Universal half pedestal

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:
Place basin level against wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure.
NOTE: Do not over tighten.

Option 2:
When installed on Classic pedestal, place basin on pedestal in correct position. Secure basin to the wall, then use silicone sealant or equivalent under pedestal foot


and between back of basin and finished wall surface.

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.

SPECIAL RECOMMENDATIONS

Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.



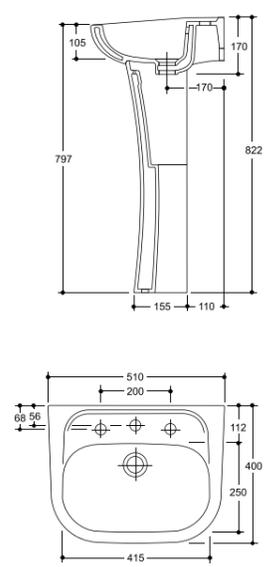

DAISY
WALL HUNG BASIN
700803WH
CDA51J31-2C00413
6005826000733

510 x 400mm semi-rectangular basin with three semi-punched tapholes (i.e. available in zero, one, two or three taphole configurations), integrated overflow, and chainstay hole through the centre semi-punched taphole.

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:
Place basin level against wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure. NOTE: Do not over tighten.


Option 2:
When installed on Classic pedestal, place basin on pedestal in correct position. Secure basin to the wall, then use silicone sealant or equivalent under pedestal foot and between back of basin and finished wall surface.

COMPLIMENTARY PRODUCTS

- 8448Z000**
10mm fixing bolt set
- 715000WH**
Classic pedestal
- 715222WH**
Universal half pedestal

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.

SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent around basin edges and finished wall surface area for secure and neat installation.

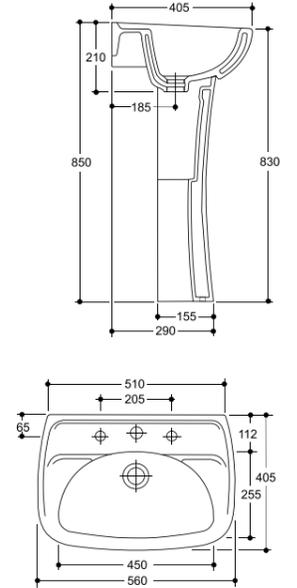

FLAMINGO
WALL HUNG BASIN
700703WH
CFM56031-2C00413
6005826000887

560 x 405mm semi-rectangular basin with three semi-punched tapholes (i.e. available in zero, one, two or three taphole configurations), integrated overflow, and chainstay hole through the centre semi-punched taphole.

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:
Place basin level against wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure. NOTE: Do not over tighten.


Option 2:
When installed on Classic pedestal, place basin on pedestal in correct position. Secure basin to the wall, then use silicone sealant or equivalent under pedestal foot and between back of basin and finished wall surface.

COMPLIMENTARY PRODUCTS

- 8448Z000**
10mm fixing bolt set
- 715000WH**
Classic pedestal
- 715222WH**
Universal half pedestal

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.

SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent around basin edges and finished wall surface area for secure and neat installation.

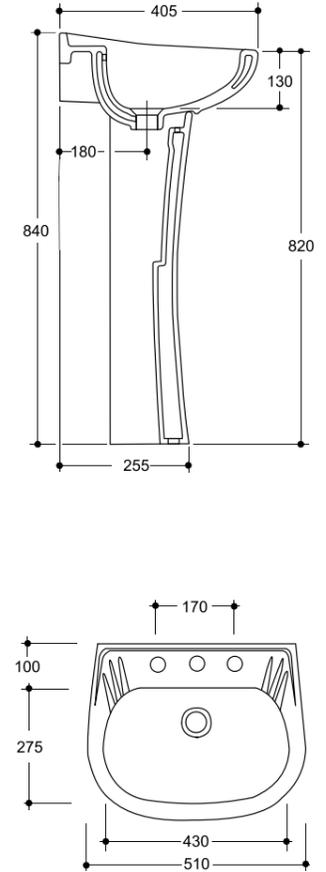

HIBISCUS
WALL HUNG BASIN
702303WH
CHI51031-2C00413
6005826001020

702303AV
CHI51031-4T00413
6005826001082

702303BB
CHI51031-1A00413
6005826001051

702303BE
CHI51031-0A00413
6005826001037

702303WG
CHI51031-1I00413
6005826001105

702303WP
CHI51031-0C00413
6005826001044

510 x 405mm rounded basin with three semi-punched tapholes (i.e. available in zero, one, two or three taphole configurations), integrated overflow, and chainstay hole through the centre semi-punched taphole.

COMPLIMENTARY PRODUCTS

- 8448Z000**
10mm fixing bolt set
- 715000WH**
Classic pedestal white
- 715222WH**
Universal half pedestal

- 8448Z000**
10mm fixing bolt set
- 715000AV**
Classic pedestal avocado

- 8448Z000**
10mm fixing bolt set
- 715000BB**
Classic pedestal bermuda blue

- 8448Z000**
10mm fixing bolt set
- 715000BE**
Classic pedestal beige

- 8448Z000**
10mm fixing bolt set
- 715000WG**
Classic pedestal wisper grey

- 8448Z000**
10mm fixing bolt set
- 715000WP**
Classic pedestal wisper pink

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:
Place basin level against wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure. NOTE: Do not over tighten.


Option 2:
When installed on Classic pedestal, place basin on pedestal in correct position. Secure basin to the wall, then use silicone sealant or equivalent under pedestal foot

and between back of basin and finished wall surface.

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.

SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.




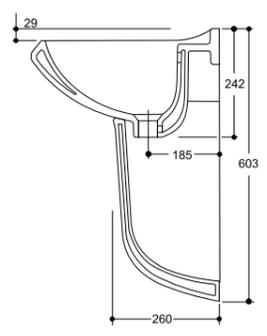

LOTUS
WALL HUNG BASIN

702603WH
CLO63J31-2C00413
6005826001495

635x485mm rounded basin with 3 semi-punched tapholes, integrated overflow and chainstay through the centre semi-punched taphole.

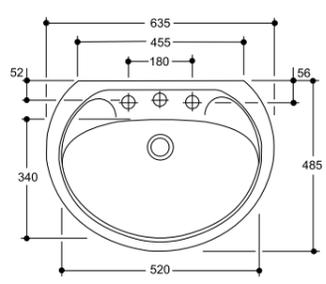

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:
Place basin level against wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure. NOTE: Do not over tighten.

Option 2:
When installed on Classic pedestal, place basin on pedestal in correct position. Secure basin to the wall, then use silicone sealant or equivalent under pedestal foot


COMPLIMENTARY PRODUCTS

- 1. 8448Z000**
10mm fixing bolt set
- 2. 715000WH**
Classic pedestal
- 3. 715222WH**
Universal half pedestal

and between back of basin and finished wall surface.

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.


SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

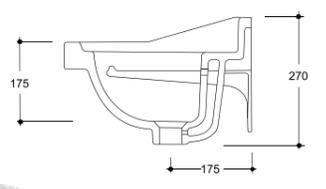

SPRINGBOK
WALL HUNG BASIN

703101WH
CSPBAJ53-2C00413
6005826002485

550x400mm rectangular basin with 2 tapholes, integrated overflow and chainstay hole. Fitted to the wall on 2 x semi-concealed cast iron brackets.

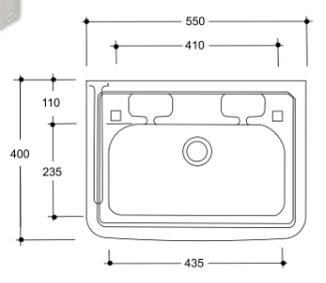

INSTALLATION INSTRUCTIONS


Place basin level against finished wall surface at correct height. Position semi-concealed brackets and mark for fixing holes. Remove basin and fix brackets to wall using rawl bolts or similar. Using silicone sealant or equivalent between back of basin and finished wall surface, place basin on brackets ensuring basin is level.

COMPLIMENTARY PRODUCT

- 1. 8118Z000**
2 x semi concealed brackets

SPECIAL RECOMMENDATIONS


Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

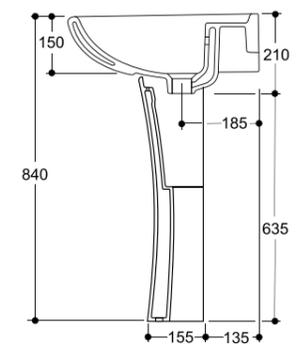

TUSCANY
WALL HUNG BASIN

700603WH
CTU56031-2C00413
6005826002515

560x415mm rounded basin with 3 semi-punched tapholes, integrated overflow and chainstay through the centre semi-punched taphole.

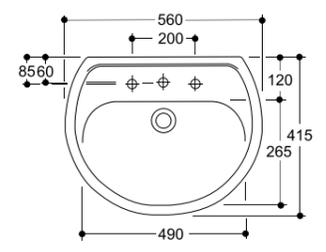

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods

Option 1:
Place basin level against wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin and secure. NOTE: Do not over tighten.


Option 2:
When installed on Classic pedestal, place basin on pedestal in correct position. Secure basin to the wall, pedestal in correct position. Secure basin to the wall, pedestal foot and between back of basin and finished wall surface.

COMPLIMENTARY PRODUCTS

- 1. 8448Z000**
10mm fixing bolt set
- 2. 715000WH**
Classic pedestal
- 3. 715222WH**
Universal half pedestal

Option 3:
Using half pedestal, install basin as per Option 1. Ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.


SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

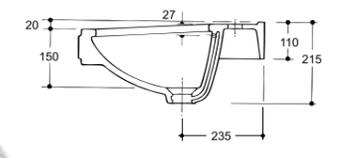

KITE
CORNER BASIN

700100WH
CKIBAE31-2C00399
6005826040203

470x415mm corner basin with 3 semi-punched tapholes, integrated overflow and chainstay through the centre semi-punched taphole.

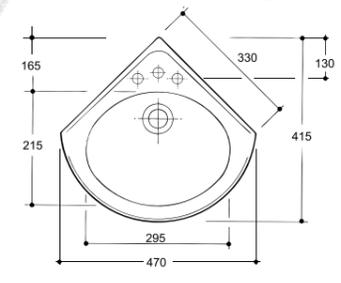

INSTALLATION INSTRUCTIONS

Place basin level against finished wall surface in the corner of the room, ensuring that the top of splash-back on both walls is level.


Position hanger brackets and mark fixing holes. Remove basin and fix brackets to wall then fit basin onto hanger brackets.

COMPLIMENTARY PRODUCTS

- 1. 8126Z000**
2 x pressed wall hanger brackets

SPECIAL RECOMMENDATIONS



Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.



EMERALD CORNER
CORNER BASIN

706100WH
CEMBAJCO0399
6005826060102

310x430mm rounded basin with 1 taphole and integrated overflow.

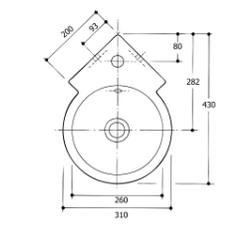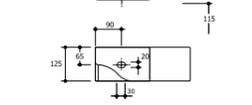

INSTALLATION INSTRUCTIONS

Basin may be installed by alternative methods:

Option 1:
Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

Option 2:
Place basin level against finished wall surface in the corner of the room, ensuring that the top of splash-back on both walls

COMPLIMENTARY PRODUCT


- 1. 8448Z000**
10mm fixing bolt set

SPARES FOR PRODUCT

- 1. 8767Z000**
CP overflow ring

is level. Mark fixing hole positions. Remove basin and drill holes. Attach one bolt to wall. Fit basin then attach second bolt and secure.


SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

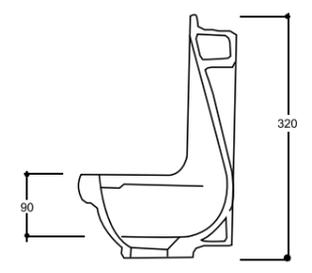

RAVEN
RECESSED BASIN

701201WH
CRABAA4N-2C00413
6005826040197

465mmx155mm recessed basin with 1 taphole on the right hand side. No overflow or chainstay hole.

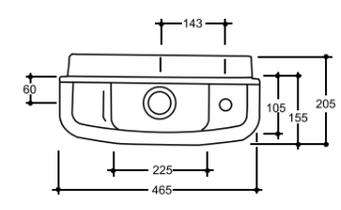


INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:
Position basin against wall at required height and mark around recessed back section of basin. Chase out the area marked [size approximately 310 x 440mm wide and 50mm deep]. Fit basin into recessed wall, ensuring that the basin is level and positioned so that finished tile surface will line up with back of splashback surround. Secure and grout basin into recess. Tile around basin.

Option 2:
Chase out area marked as per Option 1. Complete tiling then apply a liberal layer of silicon sealant or equivalent around the entire back of the basin surround. Place basin into recess and position firmly against tiles, ensuring that the basin is level. Wipe surplus silicone off tiles.



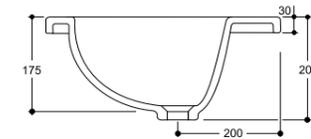


CAMEO
DROP IN BASIN

702803WH
CRABAA4N-2C00413
6005826000238

595x455mm oval drop-in basin with 3 semi-punched tapholes and chainstay through the centre semi-punched taphole. No integrated overflow, but overflow attachment available on request.

COMPLIMENTARY PRODUCTS
1. 8784Z000
Overflow attachment

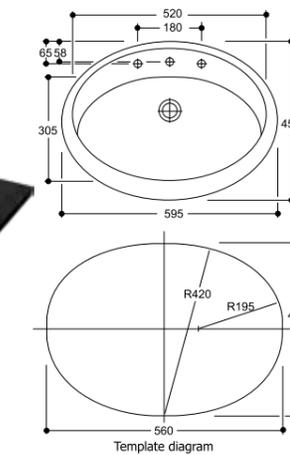


Template diagram

INSTALLATION INSTRUCTIONS

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Apply a liberal layer of silicone sealant or equivalent between the contact area of the surface and basin self-rimming surface. Place the basin into position and wipe off excess sealant and allow to dry.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into below vanity slab.




CONCORDE DROP IN
DROP IN BASIN

702703WH
CCOBAJ3N-2C00403
6005826000542

580x510mm rectangular drop-in basin with 3 semi-punched tapholes. Supplied without an overflow or chainstay hole.

COMPLIMENTARY PRODUCT
N/A

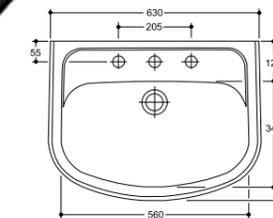


INSTALLATION INSTRUCTIONS

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Apply a liberal layer of silicone sealant or equivalent between the contact area of the surface and basin self-rimming surface. Place the basin into position and wipe off excess sealant and allow to dry.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into below vanity slab.

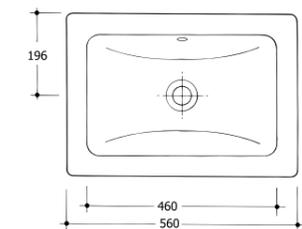


CONCORDE SLIMLINE
DROP IN BASIN

704700WH
CCODIB63-2C00402
6005826050035

560x390mm rectangular drop-in basin with integrated overflow. No provision for tapholes.

SPARES FOR PRODUCT
1. 8767Z000
CP overflow ring

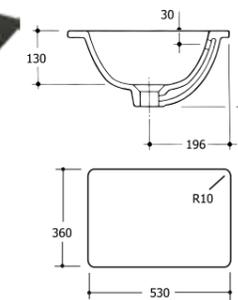

Template diagram
Template diagram rectangular size 530 x 360


INSTALLATION INSTRUCTIONS

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Apply a liberal layer of silicone sealant or equivalent between the contact area of the surface and basin self-rimming surface. Place the basin into position and wipe off excess sealant and allow to dry.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into below vanity slab.



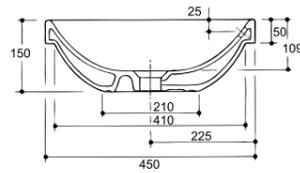

JADE ART
DROP IN BASIN

706400WH
CJABABNN-2C00400
6005826060119

450x450mm round basin with integrated overflow. No provision for tapholes.

SPARES FOR PRODUCT
1. 8767Z000
CP overflow ring

INSTALLATION INSTRUCTIONS

Basin may be installed by alternative methods:

Option 1:

Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.



Option 2:

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Apply a liberal layer of silicone sealant or equivalent between the contact area of the surface and basin self-rimming surface.


Place the basin into position and wipe off excess sealant and allow to dry.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.



Template Diagram



ICEBERG
DROP IN BASIN

703400WH
CICBANN-2C00402
6005826001334

420x420mm round drop-in basin with no provision for tapholes or integrated overflow.




COMPLIMENTARY PRODUCT
N/A

INSTALLATION INSTRUCTIONS

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Apply a liberal layer of silicone sealant or equivalent between the contact area of the surface and basin self-rimming surface. Place the basin into position and wipe off excess sealant and allow to dry.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

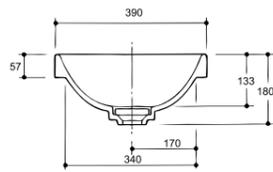

ZIRCON ART
DROP IN BASIN

705900WH
CZIBAJNN-2C00400
6005826060089

590x390mm oval drop-in basin with no provision for tapholes or integrated overflow.



SPARES FOR PRODUCT
1. 7058Z000
Zircon plate

INSTALLATION INSTRUCTIONS

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Apply a liberal layer of silicone sealant or equivalent between the contact area of the surface and basin self-rimming surface. Place the basin into position and wipe off excess sealant and allow to dry.


SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.



Template diagram



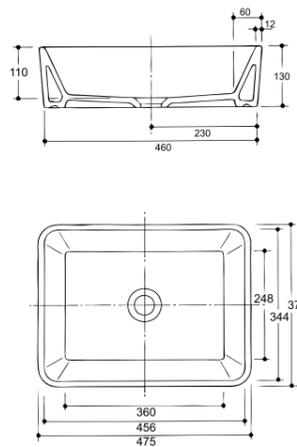

ALTO ART
COUNTER TOP BASIN

706800WH
CALBAJNN-2C00400
6005826060225

475x370mm rectangular counter top basin with no provision for tapholes or integrated overflow.

INSTALLATION INSTRUCTIONS


Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.



COMPLIMENTARY PRODUCTS
N/A

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

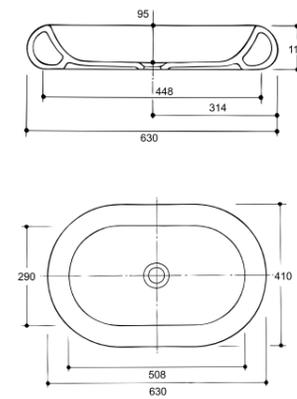

PERLA
COUNTER TOP BASIN

706500WH
CPEBABA-2C00413
6005826060133

630x410mm oval counter top basin with no provision for tapholes or integrated overflow.

INSTALLATION INSTRUCTIONS


Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.



SPARES FOR PRODUCT
N/A

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

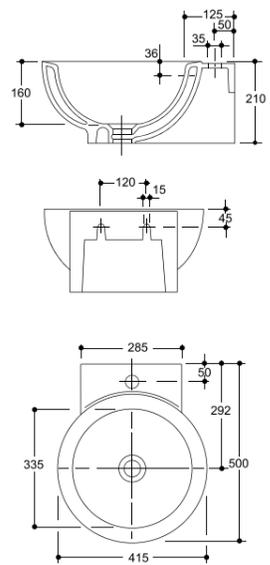

EMERALD
COUNTER TOP BASIN

703201WH
CEBAJ11-2C00400
6005826004717

415x500mm round counter top basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:

Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Loosely attach concealed bracket to basin waste. Attach bolts to wall, fit basin and secure bracket to basin waste.



COMPLIMENTARY PRODUCTS


- 8111Z000
Emerald concealed bracket
- 8448Z000
10mm fixing bolt set

Option 2:

Place basin on vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

SPECIAL RECOMMENDATIONS

Apply silicone sealant or equivalent around basin edges, and between basin and finished wall surface area for a secure and neat installation. Wipe off excess sealant and allow to dry.

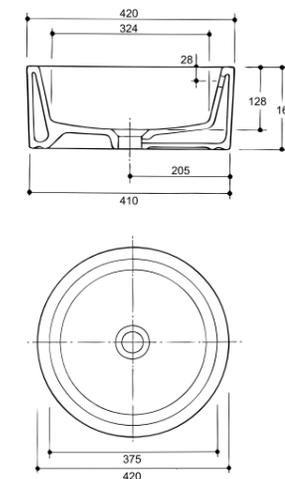

SAVANNAH DESIGN
COUNTER TOP BASIN

706300WH
CSABAJN1-2C00400
6005826060140

420x420mm round counter top basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS

Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.




SPARES FOR PRODUCT

- 8767Z000
CP overflow ring

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

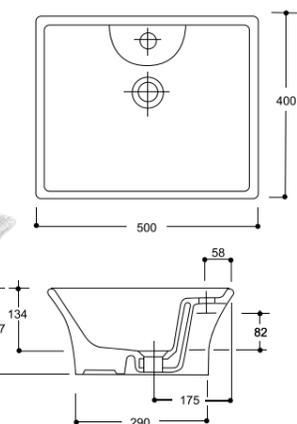

ORIELE
COUNTER TOP BASIN

704301WH
COLBAA41-2C00400
6005826040395

500x400mm rectangular counter top basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS

The basin is installed onto a vanity surface over a pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.




SPARES FOR PRODUCT

- 8767Z000
CP overflow ring

SPECIAL RECOMMENDATIONS

Apply silicone sealant or equivalent around basin edges for a neat and secure installation. Wipe off excess sealant and allow to dry.

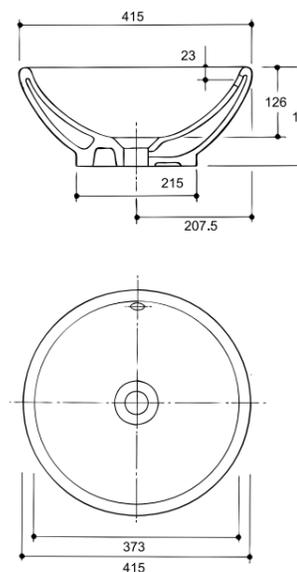

SAVOY DESIGN
COUNTER TOP BASIN

706700WH
CSVBAJN1-2C00400
6005826060157

415x415mm round counter top basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS

Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.




SPARES FOR PRODUCT

- 8767Z000
CP overflow ring

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.



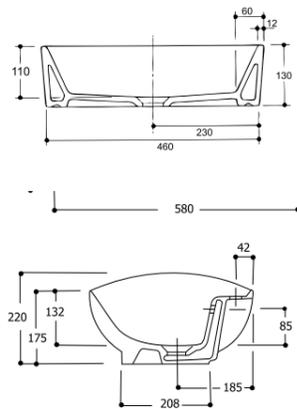


**SWIFT
COUNTER TOP BASIN**
704401WH
CFSBAA41-2C00400
6005826046418

580x390mm oval counter top basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS
Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

SPARES FOR PRODUCT
1. 8767Z000
CP overflow ring

SPECIAL RECOMMENDATIONS
Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

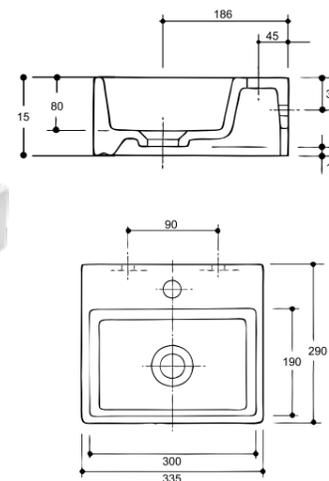

**MINI WEAVER
COUNTER TOP BASIN**
706600WH
CWEBMJ41-2C00400
6005826060126

335x290mm rectangular counter top basin with 1 taphole. No integrated overflow.

INSTALLATION INSTRUCTIONS
The basin may be installed by alternative methods:


Option 1:
Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut.

Option 2:
Place basin level against wall surface at correct height and mark fixing hole

COMPLIMENTARY PRODUCTS
1. 8448Z000
10mm fixing bolt set

positions. Attach bolts to wall, fit basin and secure.
NOTE: Do not over tighten.

SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent between basin and nished wall surface area for secure and neat installation.

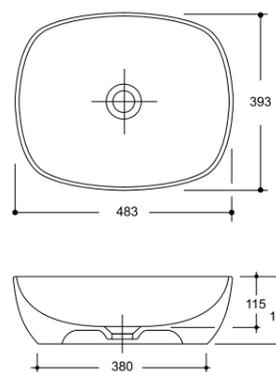


**HR SYMMETRY RECTANGULAR
COUNTER TOP BASIN**
704800WH
CSY390NN-2C00401
6005826064452

483x393mm rectangular counter top basin with no provision for tapholes or integrated overflow.

INSTALLATION INSTRUCTIONS
Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

COMPLIMENTARY PRODUCTS
N/A

SPECIAL RECOMMENDATIONS
Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

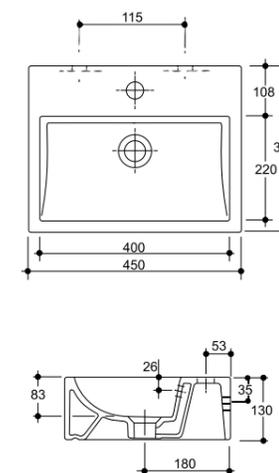

**MIDI WEAVER
COUNTER TOP BASIN**
706601WH
CWEBXJN1-2C00400
6005826050585

450x350mm rectangular counter top basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS
Basin may be installed by alternative methods


Option 1:
Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut.

Option 2:
Place basin level against wall surface at correct height and mark fixing hole positions. Attache bolts to wall, fit basin and secure.
NOTE: Do not over tighten.

COMPLIMENTARY PRODUCTS
1. 8448Z000
10mm fixing bolt set

SPARES FOR PRODUCT
1. 8767Z0
CP overflow ring

SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

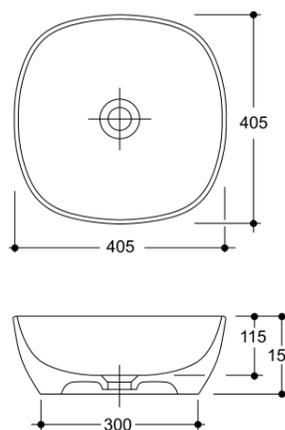


**HR SYMMETRY SQUARE
COUNTER TOP BASIN**
704900WH
CSY400NN-2C00401
6005826064278

405x405mm counter top basin with no provision for tapholes or integrated overflow.

INSTALLATION INSTRUCTIONS
Place basin on a vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

SPARES FOR PRODUCT
N/A

SPECIAL RECOMMENDATIONS
Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

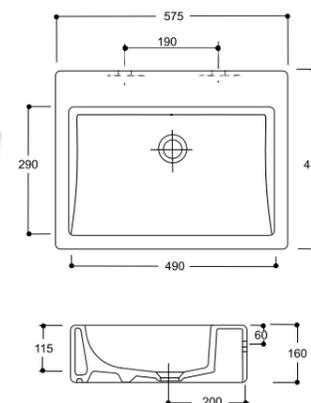

**WEAVER OTH
COUNTER TOP BASIN**
702500WH
CWEBXJN1-2C00400
6005826040364

575x455mm rectangular counter top basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS
The basin may be installed by alternative methods:

Option 1:
Place basin on vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

Option 2:
Place basin level against finished wall surface at correct height. Position semi-concealed bracket and mark for Fixing

COMPLIMENTARY PRODUCTS
1. 8448Z000
10mm fixing bolt set


2. 8131Z3000
Weaver/Sola concealed bracket with 10mm bolt

SPARES FOR PRODUCT
1. 8767Z000
CP overflow ring

holes. Remove basin and fix bracket to wall using bolt supplied. Apply a rapid hardening compound to the flat contact area of the bracket. Using silicone sealant or equivalent between back of basin and finished wall surface, place basin on bracket ensuring basin is level. Fit basin waste, and secure bracket to basin waste.

SPECIAL RECOMMENDATIONS
Always use silicone sealant or equivalent around basin edges for a secure and neat installation. Wipe off excess sealant and allow to dry.



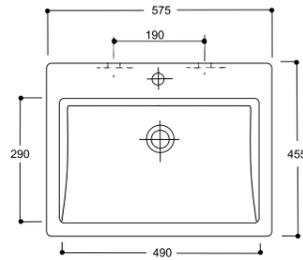

**WEAVER 1TH
COUNTER TOP BASIN**

704201WH
CWEB1TBA-2C00401
6005826040401

575x455mm rectangular counter top basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

Option 1:

Place basin on vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

Option 2:

Place basin level against finished wall surface at correct height. Position semi-concealed bracket and mark for Fixing holes. Remove basin and fix bracket to wall using bolt supplied. Apply a rapid

COMPLIMENTARY PRODUCTS

- 1. 8448Z000
10mm fixing bolt set
- 2. 8131Z300
Weaver/Sola concealed bracket with 10mm bolt



SPARES FOR PRODUCT

- 1. 8767Z000
CP overflow ring

hardening compound to the flat contact area of the bracket. Using silicone sealant or equivalent between back of basin and finished wall surface, place basin on bracket ensuring basin is level. Fit basin waste, and secure bracket to basin waste.

SPECIAL RECOMMENDATIONS

Always use silicone sealant or equivalent around basin edges for a secure and neat installation. Wipe off excess sealant and allow to dry.

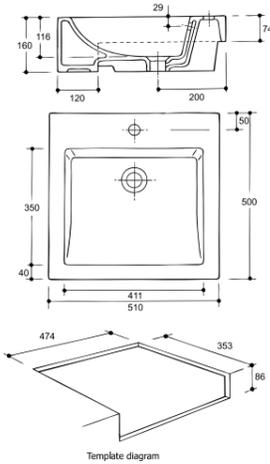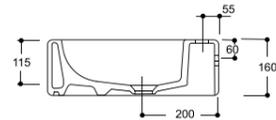

**AZALEA 510
SEMI DROP IN BASIN**

705803WH
CJBBAJN1-2C00400
6005826068207

510x500mm rectangular semi-drop-in basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS


When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Place basin into surface. Ensure basin is level, by using wooden or plastic spacers if required. Apply silicone sealant or equivalent around basin edges for a neat and secure installation. Wipe off excess sealant and allow to dry.

COMPLIMENTARY PRODUCT

N/A

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

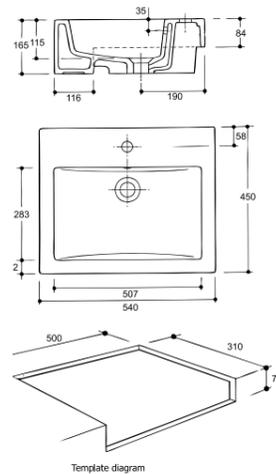

**AZALEA 540
SEMI DROP IN BASIN**

705700WH
CAZ54J41-2C00417
6005826060065

540x450mm rectangular semi-drop-in basin with 1 taphole and integrated overflow.

INSTALLATION INSTRUCTIONS

When mounted into a bathroom cabinet or vanity slab, ensure that the surface is level and secured firmly against the wall. Place basin into surface. Ensure basin is level, by using wooden or plastic spacers if required. Apply silicone sealant or equivalent around basin edges for a neat and secure installation. Wipe off excess sealant and allow to dry.


SPARES FOR PRODUCT

- 1. 8767Z000
CP overflow ring

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.



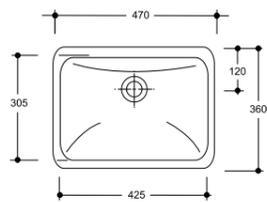

CARDINAL
UNDERMOUNT BASIN

700200WH
CCRBAJN1-2C00423
6005826040142

470x360mm Undermount basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS

Position basin under rectangular cut-out of vanity slab or under bathroom cabinet top, ensuring that overhang is evenly spaced. With basin correctly positioned, mark hole positions of the support brackets. Remove basin and drill previously marked bracket screw holes.

NOTE: Care must be taken to ensure that holes do not penetrate through slab.

The support brackets may now be screwed into place. Apply a liberal layer of silicone



COMPLIMENTARY PRODUCTS

1. 8125Z000
4 x undermount basin brackets



SPARES FOR PRODUCT

1. 8767Z000
CP overflow ring


sealant or equivalent to unglazed contact area of basin and place in final position. Slide the support bracket into place, thereby suspending the basin. Tighten locking bolts so as to ensure a watertight seal between basin and underside of vanity top. Clean off any surplus sealant.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.



Template diagram

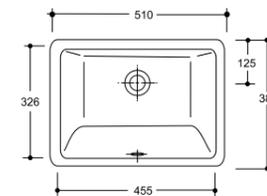

SNIPE
UNDERMOUNT BASIN

700900WH
CSNBAJNN-2C00423
6005826040173

510x380mm Undermount basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS

Position basin under rectangular cut-out of vanity slab or under bathroom cabinet top, ensuring that overhang is evenly spaced. With basin correctly positioned, mark hole positions of the support brackets. Remove basin and drill previously marked bracket screw holes.

NOTE: Care must be taken to ensure that holes do not penetrate through slab.

The support brackets may now be screwed into place. Apply a liberal layer of silicone



COMPLIMENTARY PRODUCTS

1. 8125Z000
4 x undermount basin brackets




SPARES FOR PRODUCT

1. 8767Z000
CP overflow ring

sealant or equivalent to unglazed contact area of basin and place in final position. Slide the support bracket into place, thereby suspending the basin. Tighten locking bolts so as to ensure a watertight seal between basin and underside of vanity top. Clean off any surplus sealant.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.

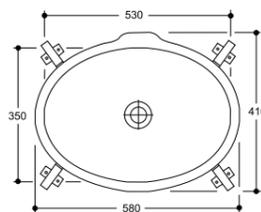

Template diagram

PRESIDENT
UNDERMOUNT BASIN

703900WH
CPRBAJNN1-2C00423
6005826001969

580x410mm Undermount basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS

Position basin under oval cut-out of vanity slab or under bathroom cabinet top, ensuring that overhang is evenly spaced. With basin correctly positioned, mark hole positions of the support brackets. Remove basin and drill previously marked bracket screw holes. NOTE: Care must be taken to ensure that holes do not penetrate through slab.

The support brackets may now be screwed into place. Apply a liberal layer of silicone





COMPLIMENTARY PRODUCTS

1. 8125Z000
4 x undermount basin brackets

sealant or equivalent to unglazed contact area of basin and place in final position. Slide the support bracket into place, thereby suspending the basin. Tighten locking bolts so as to ensure a watertight seal between basin and underside of vanity top. Clean off any surplus sealant. NOTE: Do not use epoxy.

SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into below vanity slab.

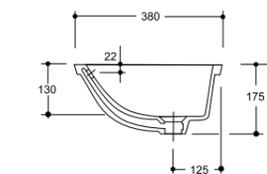

JAMES
BUTLER SINK

236001WH
CJBAJN1-2C00400
6005826060706

520x425mm rectangular Butler Sink with no provision for tapholes or integrated overflow.

INSTALLATION INSTRUCTIONS

Sink may be installed by alternative methods:

Option 1:
Place sink on vanity surface over pre-cut outlet hole. Fit waste and fasten nut under the vanity surface.

Option 2:
Position sink on supporting shelf, under rectangular cut-out of vanity slab, ensuring that overhang is evenly spaced. Apply a




COMPLIMENTARY PRODUCTS

1. BO-WST-STRAINER
90mm basket strainer waste

liberal layer of silicone sealant between the sink rim and the underside of the vanity surface. Clean off any surplus sealant.

SPECIAL RECOMMENDATIONS

Ensure sink is adequately sealed so as to prevent seepage into area below vanity slab.

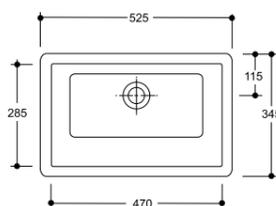

QUAIL
UNDERMOUNT BASIN

700400WH
CQLBAJNN-2C00423
6005826040128

525x345mm Undermount basin with integrated overflow. No provision for tapholes.

INSTALLATION INSTRUCTIONS

Position basin under rectangular cut-out of vanity slab or under bathroom cabinet top, ensuring that overhang is evenly spaced. With basin correctly positioned, mark hole positions of the support brackets. Remove basin and drill previously marked bracket screw holes.

NOTE: Care must be taken to ensure that holes do not penetrate through slab.

The support brackets may now be screwed into place. Apply a liberal layer of silicone sealant or equivalent to unglazed contact



COMPLIMENTARY PRODUCTS

1. 8125Z000
4 x undermount basin brackets



SPARES FOR PRODUCT

1. 8767Z000
CP overflow ring



area of basin and place in final position. Slide the support bracket into place, thereby suspending the basin. Tighten locking bolts so as to ensure a watertight seal between basin and underside of vanity top. Clean off any surplus sealant.



SPECIAL RECOMMENDATIONS

Ensure basin is adequately sealed so as to prevent seepage into area below vanity slab.



Template diagram

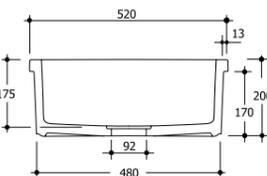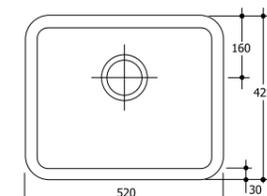

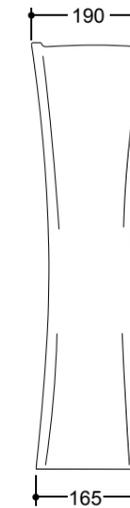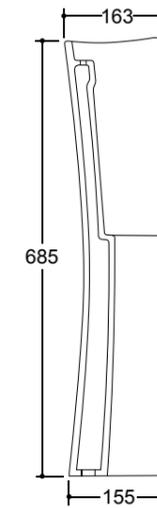

**CLASSIC
FLOOR PEDESTAL**

715000WH
CCLPEINN-2C00413
6005826000344

715000AV
CCLPEJNN-4T00413
6005826000405

715000BB
CCLPEJNN-1A00413
6005826000375

715000BE
CCLPEJNN-0A00413
6005826000351

715000WG
CCLPEJNN-1100413
6005826000429

715000WP
CCLPEJNN-0C00413
6005826000368

190x685mm floor pedestal.

COMPLIMENTARY PRODUCTS

1. 702303WH
Hibiscus Basin 510 white

1. 702303AV
Hibiscus Basin 510 avocado

1. 702303BB
Hibiscus Basin 510 bermuda blue

1. 702303BE
Hibiscus Basin 510 beige

1. 702303WG
Hibiscus Basin 510 whisper grey



1. 702303WP
Hibiscus Basin 510 wisper pink

INSTALLATION INSTRUCTIONS

When installed ensure that pedestal is fixed to floor using silicone sealant or equivalent between base and floor surface.

SPECIAL RECOMMENDATIONS

Always use silicone sealant or equivalent between back of basin and finished wall surface area for secure and neat installation.

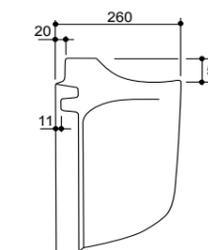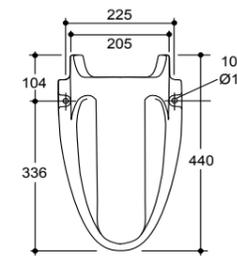

**UNIVERSAL
1/2 PEDESTAL**

715222WH
CUHFPEPE2COB
6005826061017

250x440mm wall mounted pedestal. Fixed onto the wall with 2 x 6mm fixing screws.

COMPLIMENTARY PRODUCTS

1. 8513Z000
Fixing screws

INSTALLATION INSTRUCTIONS

When using half pedestal, ensure wall contact area of the pedestal does not foul pipework. Place pedestal in position and mark fixing hole positions. Remove pedestal and drill holes. Place pedestal back in position, insert plugs and screws. Attach CP caps.

SPECIAL RECOMMENDATIONS

Always use silicone sealant or equivalent between back of basin and finished wall surface area for secure and neat installation.





UNDERMOUNT BASIN BRACKET
BASIN FIXING

8125Z000
MZ005540
6005826041217

Bracket for use with undermount basins - 4 required.



COMPLIMENTARY PRODUCTS

- 703900WH**
President undermount basin
- 700400WH**
Quail undermount basin
- 700900WH**
Snipe undermount basin
- 700200WH**
Cardinal undermount basin



BASIN FIXING BOLT SET 10MM
BASIN FIXING

8448Z000
MZ005560
6005826041569

Fixing bolt set of 2 for use with most wall mounted basins.

COMPLIMENTARY PRODUCTS

- 700303WH**
Amber classic
- 703003WH**
Bantam
- 702400WH**
Concorde 630
- 700803WH**
Daisy
- 700703WH**
Flamingo
- 702303WH**
Hibiscus
- 702603WH**
Lotus
- 700603WH**
Tuscany
- 706100WH**
Emerald Corner
- 703201WH**
Emerald
- 706600WH**
Mini weaver
- 706601**
Midi weaver
- 702500**
Weaver 0TH
- 704201**
Weaver 1TH



WALL HANGER BRACKET
BASIN FIXING

8126Z000
MZ005541
6005826041224

Pressed wall hanger bracket for use with the Kite corner basin - 2 required.



COMPLIMENTARY PRODUCTS

- 700100WH**
Kite corner basin



SOLA/WEAVER BRACKET WITH BOLT
BASIN FIXING

8131Z300
MZ005544
6005826070378

Concealed waste support bracket including 1 x 10mm bolt.

COMPLIMENTARY PRODUCTS

- 702500WH**
Weaver basin 0TH
- 702800WH**
Sola 630 medical basin
- 703700WH**
Sola 510 medical basin



SEMI CONCEALED BRACKET
BASIN FIXING

81118Z000
MZ005537
6005826041187

Semi concealed cast iron bracket for use with the Springbok basin - 2 required



COMPLIMENTARY PRODUCTS

- 703101WH**
Springbok 550 basin 2TH



EMERALD BRACKET
BASIN FIXING


8111Z000
MZ005536
6005826041170

Concealed waste support bracket for use with the Emerald 1TH basin.

COMPLIMENTARY PRODUCTS

- 703201WH**
Emerald basin 1TH



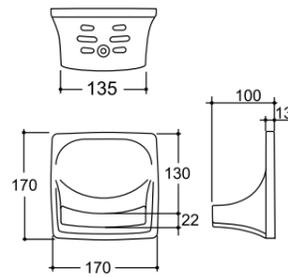


SINGLE SOAP DISH
ACCESSORY

71511084
MZ005500
6005826041279

Quick-fit single soap dish. Fixed onto the wall with glue and silicone.

COMPLIMENTARY PRODUCTS
N/A

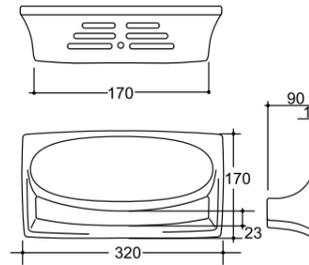


DOUBLE SOAP DISH
ACCESSORY

71511085
MZ005501
6005826041286

Quick-fit double soap dish. Fixed onto the wall with glue and silicone.

INSTALLATION INSTRUCTIONS

1. Using a glue gun, squeeze five spots of glue on the back of the product in each corner and the centre.
2. Spread a generous amount of silicone sealant or equivalent around the four edges.
3. Line the product up straight and hold against the tiled surface for 15 seconds.
4. Wipe off excess sealant and allow to dry.

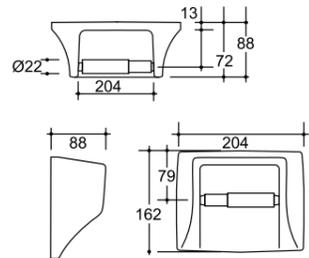


TOILET ROLL HOLDER
ACCESSORY

71511086
MZ005502
6005826041293

Quick-fit toilet roll holder. Fixed onto the wall with glue and silicone.

INSTALLATION INSTRUCTIONS

1. Using a glue gun, squeeze five spots of glue on the back of the product in each corner and the centre.
2. Spread a generous amount of silicone sealant or equivalent around the four edges.
3. Line the product up straight and hold against the tiled surface for 15 seconds.
4. Wipe off excess sealant and allow to dry.

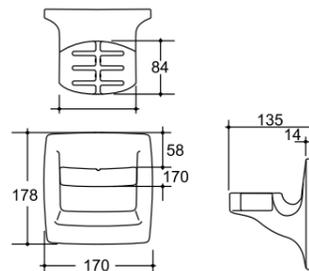

FOOT REST
ACCESSORY

71511087
MZ005503
6005826041309

Quick-fit foot rest. Fixed onto the wall with glue and silicone.

INSTALLATION INSTRUCTIONS

1. Using a glue gun, squeeze five spots of glue on the back of the product in each corner and the centre.
2. Spread a generous amount of silicone sealant or equivalent around the four edges.
3. Line the product up straight and hold against the tiled surface for 15 seconds.
4. Wipe off excess sealant and allow to dry.





ORCHID
WALL HUNG CLOSE COUPLED SUITE

438663WH
CORBTFF2C00376B
6005826040166

Open rim wall hung close coupled suite with 6/3L dual flush back inlet cistern.

COMPLIMENTARY PRODUCTS

1. 8082Z000WH
Floor bracket
2. 8084Z000WH
Bolt-through-the wall basket

3. 8531Z000WH
Jazz thermostet seat

SPARES FOR PRODUCT

1. 438600WH
Orchid cc pan
2. 7112BTWH
Orchid cc cistern shell
3. 714900WH
Hibiscus Elite top flush lid
4. 4386Z200
Orchid cc mechanism

INSTALLATION INSTRUCTIONS

1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes. Detailed installation instructions supplied with the bracket.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.

3. Place pan into position, tighten nuts and place c.p. dome cover over nuts.
4. Complete plumbing and flush the water line.
5. Flush test to ensure that all connections are watertight.
NOTE: Do not over tighten.



CONCORDE 2
CLOSE COUPLED SUITE

773862WH
COCOCNOTW2C00373B
6005826060423

Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern, soft close thermostet double flap seat and floor mounting brackets.

SPARES FOR PRODUCT


1. 772900WH
Concorde 2 cc pan
2. 7122BTWH and 714900WH
Compact cc cistern shell
3. 709900WH
Compact lid
4. 7123Z200
Universal DTF Fitting
5. 8534Z000
Concorde 2 seat
6. 8447Z000
Pan floor mounting bracket

INSTALLATION INSTRUCTIONS

1. Attach brackets to the floor. Place pan into position to ensure that brackets are in correct position. Remove pan and apply thin layer of silicone sealant to floor surface. Place pan back into position and fix screw to the bracket.
2. Assemble all cistern fittings, inlet valve on right hand side of cistern. Fit cistern to pan ensuring rubber sealing ring is in correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
3. Flush the water line.

4. Fit double flap seat.
5. Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.



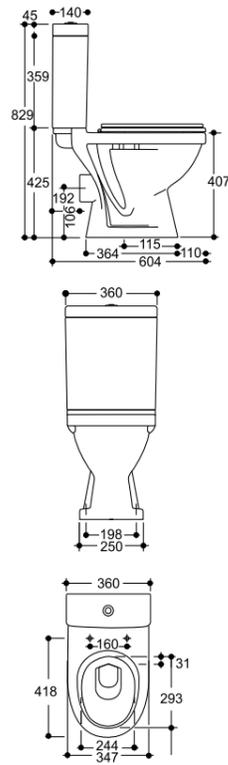


DOWNTOWN
CLOSE COUPLED SUITE
737331WH
CDOCN0NN2C00373B
6005826050011

Open rim close coupled suite with 6/3L dual flush bottom inlet cistern.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.

- COMPLIMENTARY PRODUCTS**
- 7373Z500**
Elegancia Supreme seat
 - 8513Z000**
Fixing screws
- SPARES FOR PRODUCT**
- 773300WH**
Downtown cc pan
 - 7122BTWH**
Compact cc cistern shell
 - 709900WH**
Compact lid
 - 7123Z200**
Universal DTF fitting

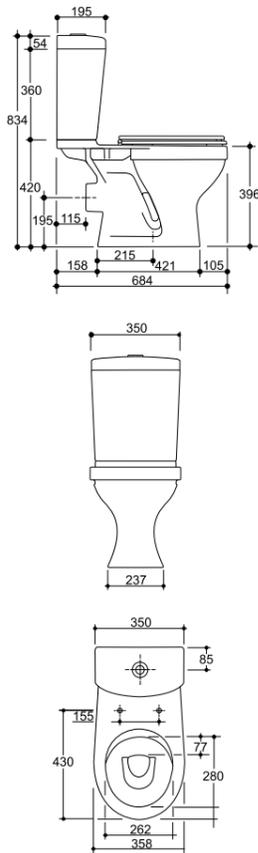


ELEGANCIA SUPREME
CLOSE COUPLED SUITE
737301WH
CELCN0NN2C00373B
6005826068689

Open rim close coupled suite with 6/3L dual flush bottom inlet cistern.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.

- COMPLIMENTARY PRODUCTS**
- 7373Z500**
Elegancia Supreme seat
 - 8513Z000**
Fixing screws
- SPARES FOR PRODUCT**
- 773301WH**
Elegancia supreme cc pan
 - 7373BTWH**
Elegancia supreme TF shell
 - 737300WH**
Elegancia supreme TF lid
 - 7123Z200**
Universal DTF Fitting

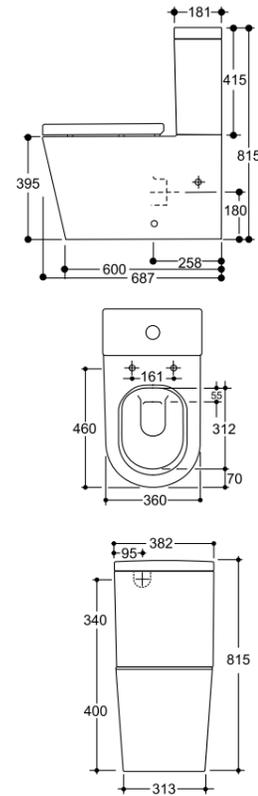


INGENU
CLOSE COUPLED SUITE
772663WH
CENT21SU-2CO
6005826061178

Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern, soft close thermostet double flap seat and floor mounting brackets.

INSTALLATION INSTRUCTIONS

- Ensure plumbing is in correct position. Assemble all cistern fittings, inlet valve on right hand side of cistern. Fit cistern to pan ensuring rubber sealing ring is in correct position and tighten bolts.
NOTE: Do not use putty as sealer.
- Fit a flexible pan collar to the pan outlet and connect to sewer pipe. Apply thin layer of silicone sealant to floor and wall surfaces, place into position.
- Flush the water line.
- Fit double flap seat.

- SPARES FOR PRODUCT**
- 8523Z100**
Entice Slimline seat
 - 8852Z100**
Entice seat hinge x2
 - 8447Z000**
Pan floor mounting bracket

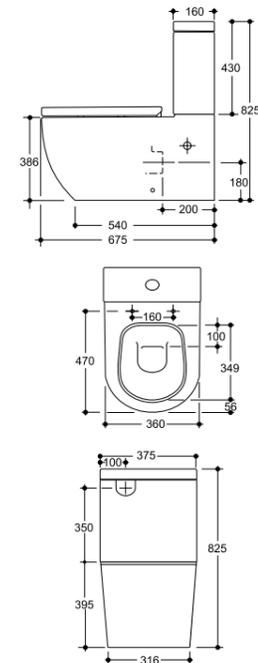

INGENU
CLOSE COUPLED SUITE
772660WH
CINPAFSU-2CO
6005826062113


Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern, soft close thermostet double flap seat and floor mounting brackets.

INSTALLATION INSTRUCTIONS

- Ensure plumbing is in correct position.
- Assemble all cistern fittings, inlet valve on right hand side of cistern. Fit cistern to pan ensuring rubber sealing ring is in correct position and tighten bolts.
NOTE: Do not use putty as sealer.
- Fit a flexible pan collar to the pan outlet and connect to sewer pipe. Apply thin layer of silicone sealant to floor and wall surfaces, place pan into position.
- Flush the water line.
- Fit double flap seat.

- SPARES FOR PRODUCT**
- 8523Z100**
Entice Slimline seat
 - 8852Z100**
Entice seat hinge x2
 - 8447Z000**
Pan floor mounting bracket



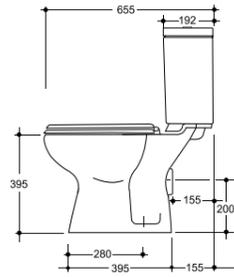

QUARTZ
CLOSE COUPLED SUITE

771363WH
CQUARTSU-2CO
6005826050004

Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern and quality wooden double flap seat.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.
- Fit double flap seat.


COMPLIMENTARY PRODUCTS

- 8513Z000**
Fixing screws

SPARES FOR PRODUCT

- 772800WH**
Tuscany cc pan
- 7166BTWH**
Hibiscus Elite TF shell
- 714900WH**
Hibiscus Elite TF lid
- 7123Z200**
Universal DTF fitting
- 8515Z000**
Bemis 5000 seat

- Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

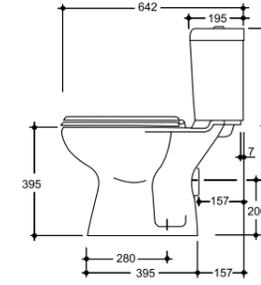

TUSCANY
CLOSE COUPLED SUITE

772863WH
CTUCCOFW2CO0373B
6005826040180

Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern and quality wooden double flap seat.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.
- Fit double flap seat.




COMPLIMENTARY PRODUCTS

- 8513Z000**
Fixing screws

SPARES FOR PRODUCT

- 772800WH**
Tuscany cc pan
- 7111BTWH**
Tuscany shell
- 713100WH**
Tuscany lid
- 7123Z200**
Universal DTF fitting
- 8515Z000**
Bemis 5000 seat

- Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

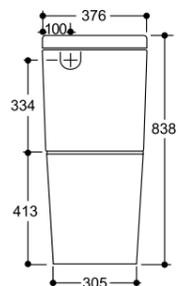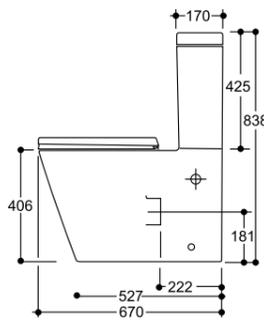

REFINE
CLOSE COUPLED SUITE

772662WH
CREFWHSU-2CO
6005826064650

Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern and soft close thermostet double flap seat and floor mounting brackets.



INSTALLATION INSTRUCTIONS

- Ensure plumbing is in correct position.
- Assemble all cistern fittings, inlet valve on right hand side of cistern. Fit cistern to pan ensuring rubber sealing ring is in correct position and tighten bolts.
NOTE: Do not use putty as sealer.
- Fit a flexible pan collar to the pan outlet and connect to sewer pipe. Apply thin layer of silicone sealant to floor and wall surfaces, place pan into position.
- Flush the water line.
- Fit double flap seat.

SPARES FOR PRODUCT

- 7128Z000**
Refine seat
- 8852Z100**
Entice seat hinge x2
- 8447Z000**
Pan floor mounting bracket

- Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

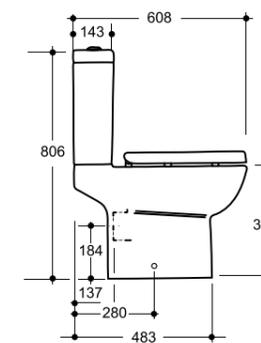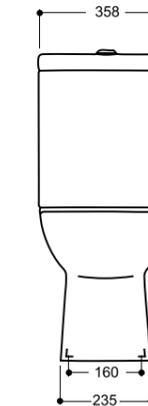

URBAN COMPACT
CLOSE COUPLED SUITE

772562WH
CURCNOTF2CO0373B
6005826060379

Closed rim close coupled suite with 6/3L dual flush bottom inlet cistern and soft close thermostet double flap seat and floor mounting brackets.

INSTALLATION INSTRUCTIONS


- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.
- Fit double flap seat.
- Complete all plumbing connections and flush test. Ensure that the correct water

SPARES FOR PRODUCT

- 772500WH**
Urban cc pan
- 7122BTWH**
Compact shell
- 709900WH**
Compact lid
- 8535Z000WH**
Urban seat
- 7123Z200**
Universal DTF fitting
- 8447Z000**
Pan floor mounting bracket

- level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.



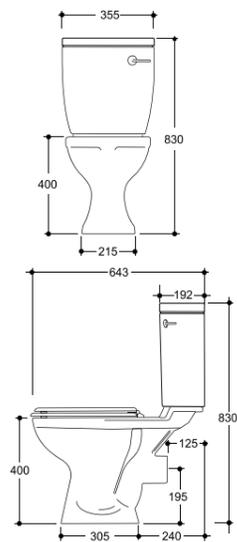

**HIBISCUS ELITE FF
CLOSE COUPLED SUITE**

772402WH
CHICNOTF2C00374B
6005826060829

772402AV
CHICNOFF4T00374B
6005826001082

772402BB
CHICNOFF1A00374B
6005826001051

772402BE
CHICNOFF0A00374B
6005826001037

772402WG
CHICNOFF1I00374B
6005826001105

772402WP
CHICNOFF0C00374B
6005826001044

Open rim close coupled suite with 6L single front flush bottom inlet cistern.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.

COMPLIMENTARY PRODUCTS

- 8531Z000 Jazz Thermoset seat white
- 8513Z000 Fixing screws

SPARES FOR PRODUCT

- 772400WH Hibiscus Elite cc pan
- 7116BFWH Hibiscus Elite FF shell
- 711600WH Hibiscus Elite FF lid
- 7105Z020 Universal FF fitting

- 772400AV Hibiscus Elite cc pan avocado
- 7116BFAV Hibiscus Elite FF shell avocado
- 711600AV Hibiscus Elite FF lid avocado
- 7105Z020 Universal FF fitting


- 772400BB Hibiscus Elite cc pan bermuda blue
- 7116BFBB Hibiscus Elite FF shell bermuda blue
- 711600BB Hibiscus Elite FF lid bermuda blue
- 7105Z020 Universal FF fitting

- 772400BE Hibiscus Elite cc pan beige
- 7116BFBE Hibiscus Elite FF shell beige
- 711600BE Hibiscus Elite FF lid beige
- 7105Z020 Universal FF fitting

- 772400WG Hibiscus Elite cc pan whisper grey
- 7116BFWG Hibiscus Elite FF shell whisper grey
- 711600WG Hibiscus Elite FF lid whisper grey
- 7105Z020 Universal FF fitting

- 772400WP Hibiscus Elite cc pan whisper pink
- 7116BFWP Hibiscus Elite FF shell whisper pink
- 711600WP Hibiscus Elite FF lid whisper pink
- 7105Z020 Universal FF fitting

- Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

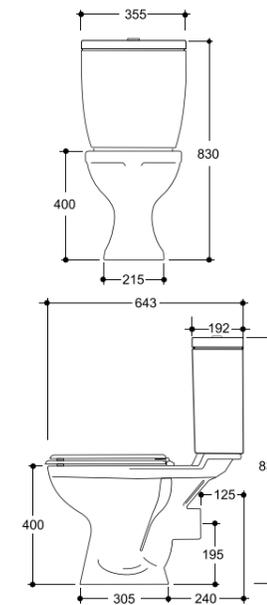

**HIBISCUS ELITE DUAL TOP FLUSH
CLOSE COUPLED SUITE**

772401WH
CHICNOTF2C00376B
6005826068993

Open rim close coupled suite with 6L dual flush bottom inlet cistern.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.
- Fit double flap seat.



COMPLIMENTARY PRODUCTS

- 8531Z000 Jazz Thermoset seat
- 8513Z000 Fixing screws

SPARES FOR PRODUCT

- 772400WH Hibiscus Elite cc pan
- 7116BTWH Hibiscus Elite TF shell
- 714900WH Hibiscus Elite TF lid
- 7123Z200 Universal DTF fitting

- Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

**HIBISCUS ELITE V/P
CLOSE COUPLED SUITE**

772401WH
CHICNOVP2C00408B
6005826068276

Open rim close coupled suite with 6L front push button, bottom inlet cistern.

INSTALLATION INSTRUCTIONS

- Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fit cistern to pan ensuring sealing ring is in the correct position and tighten wing nuts.
NOTE: Do not use putty as sealer.
- Flush the water line.
- Fit double flap seat.





COMPLIMENTARY PRODUCTS


- 8531Z000 Jazz Thermoset seat
- 8513Z000 Fixing screws

SPARES FOR PRODUCT

- 772400WH Hibiscus Elite cc pan
- 7116BPWH Hibiscus Elite V/P shell
- 711700WH Hibiscus Elite duct lid
- 7108Z200 V/P cc fitting

- Complete all plumbing connections and flush test. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

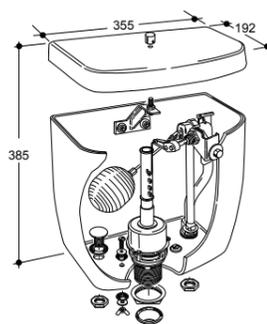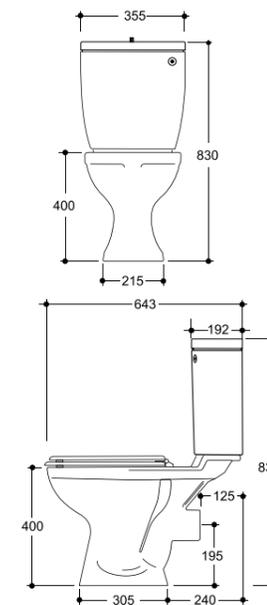

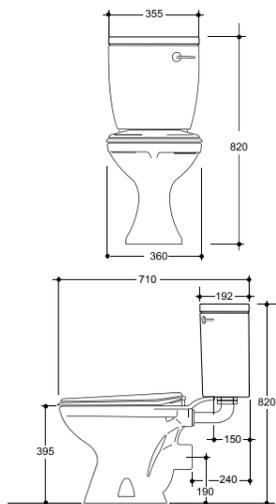

DAISY ELITE FF
SEMI CLOSE COUPLED SUITE

772403WH
CDASNOFF2C00374B
6005826069273

Open rim semi-close coupled suite with 6L single front flush bottom inlet cistern.

INSTALLATION INSTRUCTIONS

1. Line up pan from finished wall by placing template between wall and pan shelf.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Assemble all cistern fittings, inlet valve on right hand side of cistern and fit flush pipe bend to flush valve tailpiece. Place assembled cistern on pan shelf, levelling same and screw fix to wall. NOTE: Do not use putty as sealer.
4. Flush the water line.





COMPLIMENTARY PRODUCTS

1. 8515Z000
Fixing screws
2. 8513Z000
Bemis 5000 seat

SPARES FOR PRODUCT

1. 751400WH
Daisy cc pan
2. 7116BTWH
Hibiscus Elite TF shell
3. 714900WH
Hibiscus Elite TF lid
4. 7123Z200
Daisy Elite FF fitting

5. Complete all plumbing connections and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation. NOTE: The warranty will not apply to any product installed with cement.

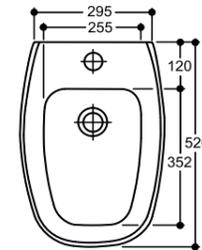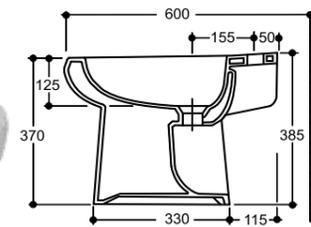

CONCORDE
BIDET

773701WH
CCOBTJ41-2C00413
6005826000535

One taphole over rim water supply pedestal bidet.

INSTALLATION INSTRUCTIONS



After all plumbing points have been installed and wall tiling has been completed:

1. Fit mixer and waste outlet to ware, ensuring free movement of waste plug and linkage.
2. Mark the position of the bidet foot on the tiles and apply a liberal layer of silicone sealant or equivalent over the entire marked out floor area. Position the bidet and press down. Clean off excess sealant.



COMPLIMENTARY PRODUCT
N/A

3. Complete water and waste connections and test to ensure installation joints are watertight.
4. Always use silicone sealant or equivalent between the pan and the finished floor surface for a secure and neat installation. NOTE: The warranty will not apply to any product installed with cement.

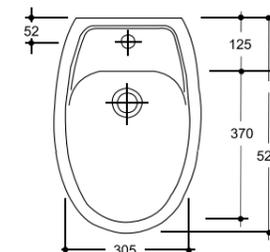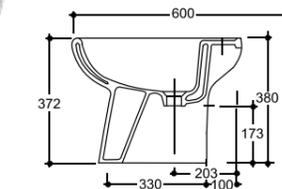

TUSCANY
BIDET

774001WH
CTUBTA41-2C00413
6005826002539

Over rim water supply pedestal bidet. Fixed to the floor with 2 x 6mm fixing screws.

INSTALLATION INSTRUCTIONS

After all plumbing points have been installed and wall tiling has been completed:

1. Fit mixer and waste outlet to ware, ensuring free movement of waste plug and linkage.
2. Mark the position of the bidet foot on the tiles and apply a liberal layer of silicone sealant or equivalent over the entire marked out floor area. Position the bidet and press down. Clean off excess sealant.



COMPLIMENTARY PRODUCTS

1. 8513Z000
Fixing screws

3. Complete water and waste connections and test to ensure installation joints are watertight.
4. Always use silicone sealant or equivalent between the pan and the finished floor surface for a secure and neat installation. NOTE: The warranty will not apply to any product installed with cement.



AFSAN
LOW LEVEL PAN
750600WH
CAFPFNN-2C00413
6005826023046

Open rim low level pan. Compatible with a low level cistern, duct cistern, back inlet flush valve or concealed cistern.

INSTALLATION INSTRUCTIONS

When installed with a low level cistern:

1. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Flush the water line.



COMPLIMENTARY PRODUCTS

1. **8512Z000**
Eco Jazz seat
2. **7373LLWH**
Aquasave LL cistern
3. **8513Z000**
Fixing screws
4. Complete all plumbing connections to suite and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.
5. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.



AQUASAVE
LOW LEVEL SUITE
750151WH
CAQUSUSU2COB
6005826064018

Low level suite including open rim pan and low level 6L capacity bottom inlet cistern. Designed to flush on 4.5L.

INSTALLATION INSTRUCTIONS

When installed with a low level cistern:

1. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Flush the water line.



COMPLIMENTARY PRODUCT

1. **8512Z000**
Eco Jazz seat
 2. **8513Z000**
Fixing screws
- SPARES FOR PRODUCT**
1. **750600WH**
Afsan pan
 2. **7373LLWH**
Aquasave cistern



AQUASAVE SLIMLINE
LOW LEVEL SUITE
750152WH
CAQUSLSU2C00413B
6005826064537

Low level suite including open rim pan and polypropylene low level 6L capacity side inlet cistern. Designed to flush on 4.5L.

INSTALLATION INSTRUCTIONS

When installed with a low level cistern:


1. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Flush the water line.



COMPLIMENTARY PRODUCT

1. **8512Z000**
Eco Jazz seat
 2. **8513Z000**
Fixing screws
- SPARES FOR PRODUCT**
1. **750600WH**
Afsan pan
 2. **8825Z000**
Aquasave slimline cistern

4. Complete all plumbing connections and test flush. Ensure that the correct water level has been set and that the operating overflow tube height conforms and operates according to local by-laws and SABS specifications.
5. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

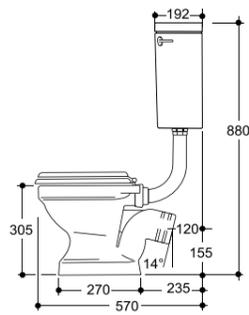

JUNIOR
LOW LEVEL SUITE

751358WH
CJUSNOFF2C00413B
6005826061680

Low level suite including open rim 104° outlet pan, Junior Jazz double flap seat and low level 6L bottom inlet cistern. Pan also compatible with a duct cistern, a back inlet flush valve and a concealed cistern.

INSTALLATION INSTRUCTIONS

When installed with a low level cistern:



1. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Flush the water line.
4. Fit double flap seat.



SPARES FOR PRODUCT

1. 751300WH Junior pan
2. 7116LLWH Junior Elite cistern
3. 8532Z000 Junior Jazz seat

5. Complete all plumbing connections to suite and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

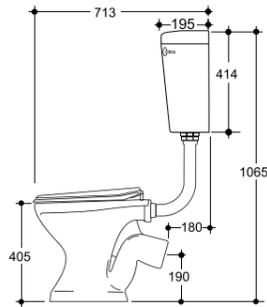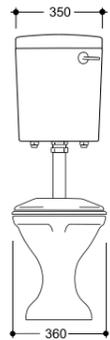

KLIP
LOW LEVEL PAN

751200WH
CKLPAJNN-2C00413
6005826001440

Low level suite including open rim 104° outlet pan with enlarged pedestal and low level 6L bottom inlet cistern. Pan also compatible with a duct cistern, a back inlet flush valve and a concealed cistern.

INSTALLATION INSTRUCTIONS



1. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Flush the water line.



COMPLIMENTARY PRODUCT

1. 7373LLWH Hibiscus Elegancia cistern
2. 8515Z000 Bemis 5000 seat

4. Complete all plumbing connections and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.
5. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

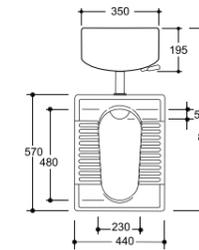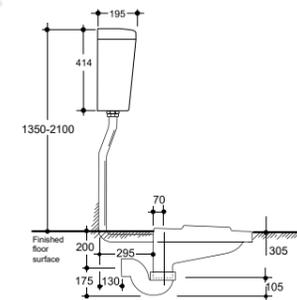

ORIENTAL
SQUAT PAN

502300WH
COLSQ0NN-2C00413
6005826060188

One piece closed rim squat pan with integrated raised foot tread compatible with a low level cistern, a back inlet flush valve or a concealed cistern.


INSTALLATION INSTRUCTIONS

1. Install trap bedded on concrete pad and connect to drain using flexible pan connector. Fit pan outlet to trap inlet, ensuring that top of pan rim is level.
NOTE: Pan bowl and sides all round to be supported and encased using a silicone sealant or equivalent.
2. Fix pan into the floor ensuring the top surface is level with the finished floor level and the foot treads are exposed above the finished floor surface.
3. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position, at desired height, and connect telescopic flushpipe.
4. Flush the water line.
5. Complete all plumbing connections and test flush. Ensure that the correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.



COMPLIMENTARY PRODUCT

1. 220100WH Oriental P-trap
2. 5022Z100 Telescopic flush pipe
3. 7373LLWH Hibiscus Elegancia low level cistern
4. Cobra 107EC-15 Hose Bib tap
5. Cobra 278245SP Trigger Spray
6. Cobra S-014 Hook

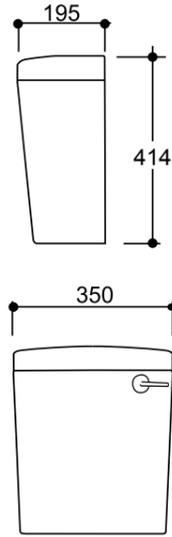

HIBISCUS ELEGANCIA / AQUASAVE
LOW LEVEL CISTERN

7373LLWH
CELWFFCI-2C00406
6005826069280

6L bottom inlet low level cistern. Compatible with all back inlet floor mounted pans.

COMPLIMENTARY PRODUCTS

- 750600WH**
Afsan low level pan
- 751200WH**
Klip low level pan
- 502300WH**
Oriental squat pan


SPARES FOR PRODUCT

- 7373BFWH**
Elegancia front flush shell
- 737000WH**
Elegancia front flush lid
- 71052020**
Universal front flush fittings

INSTALLATION INSTRUCTIONS

- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
- Complete all plumbing connections and test flush. Ensure that correct water level has been set and that operating

overflow tube height conforms to and operates according to local by-laws and SABS specifications.

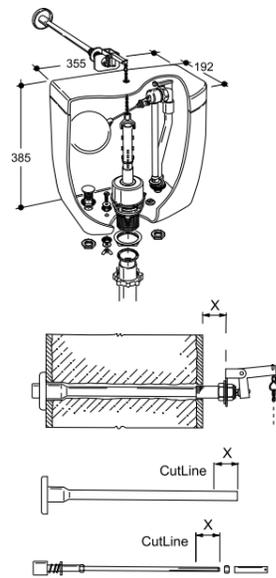

HIBISCUS ELITE
DUCT CISTERN

7116DPWH
CHISHKDU2C00420B
6005826068887


6L bottom inlet low level cistern complete with lid, fittings, metal pushbutton mechanism and duct flush pipe. Compatible with all back inlet floor and wall hung pans.

SPARES FOR PRODUCT

- 7116BF**
Hibiscus Elite FF shell
- 711700**
Hibiscus Elite Duct lid
- 71092000**
Hibiscus Elite Duct fittings

INSTALLATION INSTRUCTIONS

- Assemble all cistern fittings.
- Drill hole through wall at correct height. Fit cp rod through the wall and attach mechanism as per drawing. The metal plate must fit flush against the wall inside the duct.
- If the rod is too long. Measure distance 'x'. Remove rod, disassemble mechanism and cut 'x' off the cp pipe and the threaded rod inside the cp rod then re-assemble.
- Place pan into position and mark fixing holes. Remove pan and drill holes.
- Place pan back into position, attach flush pipe to pan, fix screw pan to the floor and secure.
- Flush the water line.
- Complete all plumbing connections to suite and test flush.
- Always use silicone sealant or equivalent between the pan and the finished floor surface for a secure and neat installation. NOTE: The warranty will not apply to any product installed with cement.

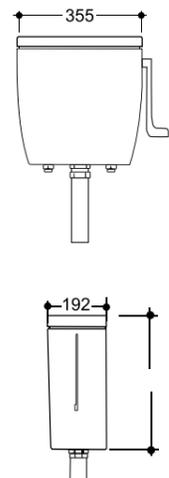

HIBISCUS ELITE
PARAPLEGIC CISTERN

7116LPWH
CHISHKPA2C00349B
6005826066982

6L bottom inlet low level paraplegic cistern with purpose made CP side flush lever.


SPARES FOR PRODUCT

- 7116BSWH**
Hibiscus Elite Paraplegic shell
- 711600WH**
Hibiscus Elite FF lid
- 71062000**
Hibiscus Elite Paraplegic fittings

INSTALLATION INSTRUCTIONS

- Assemble all cistern fittings, inlet valve on same side of cistern as flush lever. Fix cistern to finished wall surface in line with pan position.
- Complete all plumbing connections to suite and test flush. Ensure that correct water level has been set and that

operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.

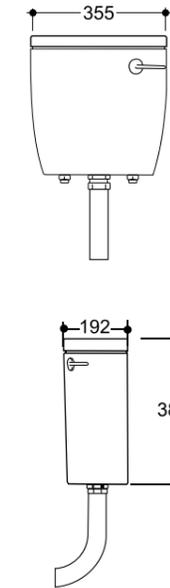

ELITE JUNIOR
LOW LEVEL CISTERN

7116LLWH
CJUSH0NN2C00406B
6005826068009


6L bottom inlet low level cistern compatible with all back inlet floor mounted pans.

SPARES FOR PRODUCT

- 7116BF**
Hibiscus Elite FF shell
- 711600**
Hibiscus Elite FF lid
- 71052400**
Elite LL FF fitting

INSTALLATION INSTRUCTIONS

- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
- Complete all plumbing connections and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.

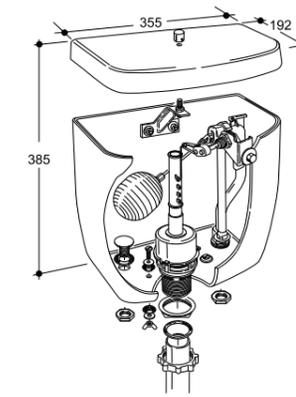

HIBISCUS ELITE LL
VANDAL PROOF CISTERN

7116LVWH
CHISHKVN2C00407B
6005826068856

6L bottom inlet low level cistern complete with lid, fittings, metal front pushbutton mechanism and low level flush pipe. Compatible with all back inlet floor


mounted pans.

SPARES FOR PRODUCT

- 7116BP**
Hibiscus Elite V/P shell
- 711700**
Hibiscus Elite Duct lid
- 71082000**
V/P LL fitting

INSTALLATION INSTRUCTIONS

- Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
- Complete all plumbing connections and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.

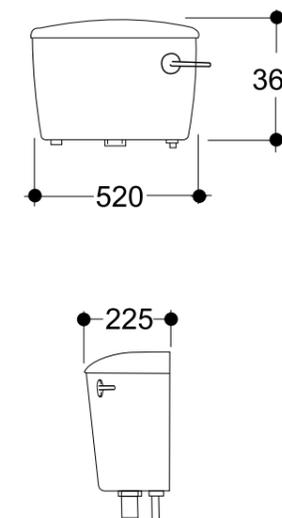

PROTEA
LOW LEVEL CISTERN

7116LPWH
CPOSHJFF2C00407B
6005826040494

11L bottom inlet low level cistern compatible with all back inlet floor mounted pans.

SPARES FOR PRODUCT

- 7100BF**
Protea shell BI
- 714000**
Protea Lid
- 71002200**
Protea LL fittings

INSTALLATION INSTRUCTIONS

- Assemble all cistern fittings, inlet valve on same side of cistern as flush lever. Fix cistern to finished wall surface in line with pan position.
- Complete all plumbing connections to suite and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.





PEARL C/W RAILS
PARAPLEGIC SEMI CLOSE COUPLED SUITE

730103WH
CPEPSRSI2C00349B
6005826061109

Raised LL pan with 6L bottom inlet cistern with purpose made CP side flush lever, purpose made thermoset seat with cover plate, rear and side grab rails.

COMPLIMENTARY PRODUCT


- 1. 8513Z000
Fixing screws

SPARES FOR PRODUCT

- 1. 750202WH
Protea paraplegic pan
- 2. 7300LPWH
Pearl cistern
- 3. 7300Z000
Pearl seat
- 4. 8939Z000
Side grab rail
- 5. 8940Z000
Cistern grab rail

INSTALLATION INSTRUCTIONS

1. Install pan 750mm from the wall to the front rim. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
2. Assemble all cistern fittings, then fit cistern 545mm from bottom of cistern to floor.
3. Install seat and cut connector plate to size, then install.
4. Flush the water line.
5. Complete all plumbing connections to suite and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates to local by laws and SABS specification. Detailed installation instructions supplied with the suite.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

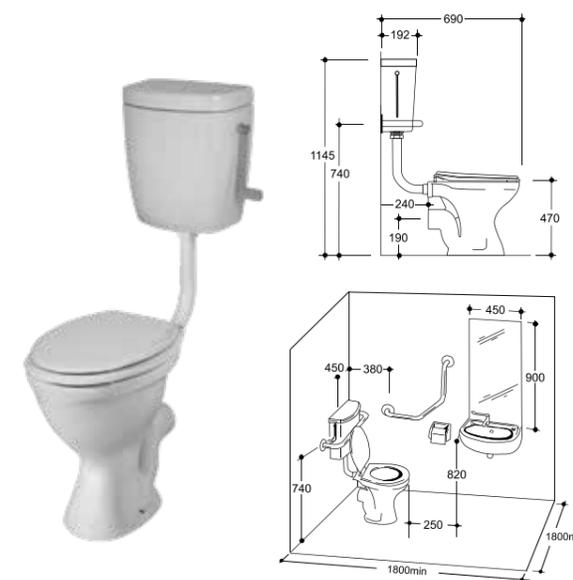

PROTEA PARAPLEGIC
PARAPLEGIC LOW LEVEL SUITE

750246WH
CPRPPSI2C00349B
6005826064490

Raised LL pan with 6L bottom inlet cistern with purpose made CP side flush lever.

COMPLIMENTARY PRODUCT

- 1. 8515Z100
Buxton Sta-tite seat

- 2. 8513Z000
Fixing screws


SPARES FOR PRODUCT

- 1. 750202WH
Protea Paraplegic Pan
- 2. 7116LPWH
Hibiscus Elite Paraplegic cistern

INSTALLATION INSTRUCTIONS

1. Assemble all cistern fittings with inlet valve on right hand side of cistern. Fix cistern to finished wall surface in line with pan position.
2. Place pan into position and mark hole positions. Remove pan and drill holes. Place pan back into position, fix screw to the floor and secure.
3. Flush the water line.
4. Complete all plumbing connections and test flush. Ensure that correct water level has been set and that operating overflow tube height conforms to and operates according to local by-laws and SABS specifications.
5. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.



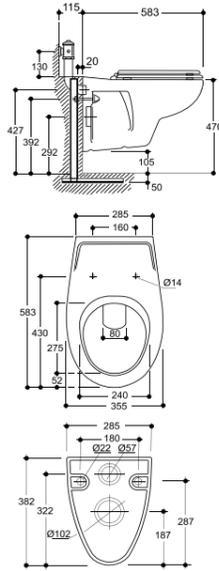

ORCHID PARAPLEGIC WALL HUNG PAN

439016WH
CORPBENN-2C00373
6005826064292

Back inlet open rim pan compatible with back inlet exposed flush valve and concealed cistern with remote actuator plate. Designed to flush on 6L.

INSTALLATION INSTRUCTIONS


1. Extend wall behind pan by 115 mm, and 490 mm above finished floor surface.
2. Determine pan height, prepare water inlet and outlet heights, and adjust threaded rods to height of pan fixing holes. Detailed installation instructions supplied with the bracket.
3. Fit floor bracket into recessed wall and

COMPLIMENTARY PRODUCT

1. 8945Z000
Single Flap Sta-tite seat
2. 8515Z100
Buxton Sta-tite seat

floor, then complete brickwork.

4. Place pan into position, tighten nuts and place c.p. dome cover over nuts.
5. Complete plumbing and flush the water line.
6. Flush test to ensure that all connections are watertight.
NOTE: Do not over tighten.




PROTEA PARAPLEGIC GRAB RAIL

8942Z000
MZ006626
8942Z000 6005826061055

750mm x 220mm x 32mm

COMPLIMENTARY PRODUCTS

N/A




SIDE WALL GRAB RAIL

8939Z000
MZ005742
8939Z000 6005826061024

300mm x 300mm x 32mm

COMPLIMENTARY PRODUCTS

N/A

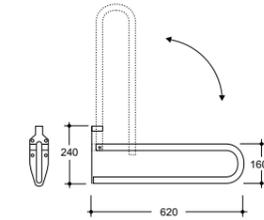


DROP DOWN SUPPORT GRAB RAIL

8943Z000
MZ006627
8943Z000 6005826061062

650mm x 160mm x 25mm

COMPLIMENTARY PRODUCTS

N/A




PEARL PARAPLEGIC GRAB RAIL

8940Z000
MZ005743
8940Z000 6005826061031

750mm x 250mm x 32mm

COMPLIMENTARY PRODUCTS

N/A

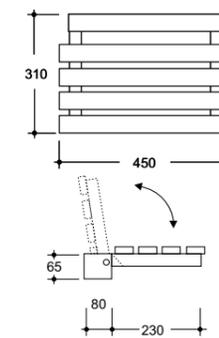


SHOWER SEAT

8944Z000
MZ006628
8944Z000 6005826061079

450mm x 310mm x 65mm

COMPLIMENTARY PRODUCTS

N/A

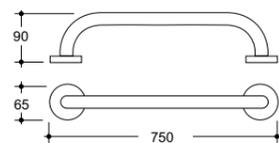

WALL HUNG PAN GRAB RAIL



8941Z000
MZ005744
8941Z000 6005826061048

750mm x 90mm x 32mm

COMPLIMENTARY PRODUCTS

N/A



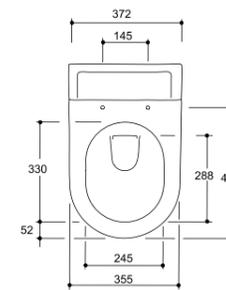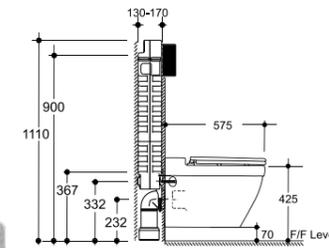

ENERGY
WALL HUNG PAN

439500WH
CEVPAONN2C00377
6005826060287

Back inlet closed rim pan and thermoset soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

SPARES FOR PRODUCT



1. **8853Z000**
Energy seat

2. **8852Z100**
Entice seat hinge x 2

INSTALLATION INSTRUCTIONS

- Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes.
- Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
Threaded rods to protrude minimum 90mm from the finished wall surface.
- Place washers and nuts on to edge of threaded rods.

- Place pan into position. Locate slotted bushes on to rods, between back of pan and washer and nut. Tighten nuts.
- Flush the water line.
- Fit double flap seat.
- Complete all plumbing connections and test flush to ensure all connections are watertight.
NOTE: Do not over tighten.

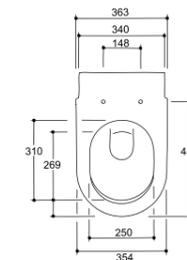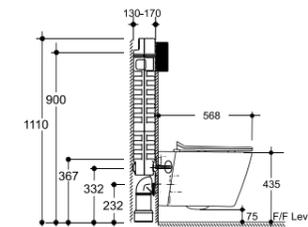

ENTICE
WALL HUNG PAN

439600WH
CENPAFWH-2C00377
6005826060294

Back inlet closed rim pan and thermoset soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

1. **8523Z100**
Entice slimline seat

2. **8852Z100**
Entice seat hinge x 2


SPARES FOR PRODUCT

INSTALLATION INSTRUCTIONS

- Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes.
- Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
Threaded rods to protrude minimum 90mm from the finished wall surface.
- Place washers and nuts on to edge of threaded rods.

- Place pan into position. Locate slotted bushes on to rods, between back of pan and washer and nut. Tighten nuts.
- Flush the water line.
- Fit double flap seat.
- Complete all plumbing connections and test flush to ensure all connections are watertight.
NOTE: Do not over tighten.



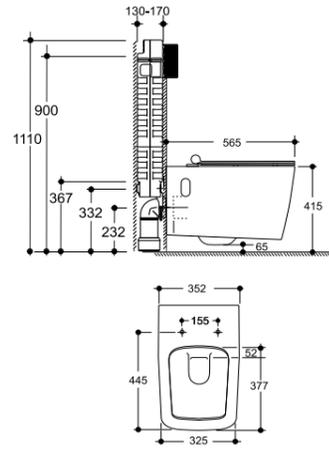

REFINE
WALL HUNG PAN

439900WH
CREFWHNN-2C00377
6005826065434

Back inlet closed rim pan and thermostet soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS


1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
Threaded rods to protrude minimum 90mm from the finished wall surface.
3. Place washers and nuts on to edge of threaded rods.



SPARES FOR PRODUCT

1. **7128Z000**
Refine seat
2. **8852Z100**
Entice seat hinge x 2

4. Place pan into position. Locate slotted bushes on to rods, between back of pan and washer and nut. Tighten nuts.
5. Flush the water line.
6. Fit double flap seat.
7. Complete all plumbing connections and test flush to ensure all connections are watertight.
NOTE: Do not over tighten.

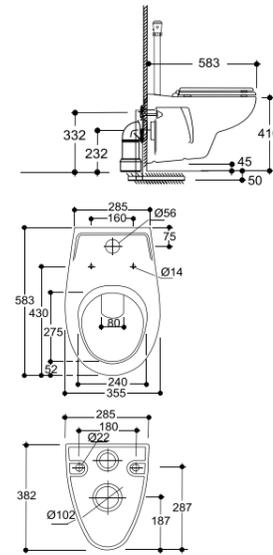

ORCHID TI
WALL HUNG PAN

439100WH
CORBTTPA-2C00422
6005826001921

Top inlet open rim pan, compatible with exposed top inlet flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS


1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes. Detailed installation instructions supplied with bracket.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.



COMPLIMENTARY PRODUCT

1. **8531Z000**
Jazz Thermostet seat
2. **8082Z000**
Floor bracket
3. **8084Z000**
Bolt-through-the-wall bracket
4. **Cobra FJ2.210**
Flush Valve

3. Place pan into position, tighten nuts and place c.p. dome cover nuts.
4. Complete plumbing and flush the water line.
5. Flush test to ensure that all connections are watertight.
NOTE: Do not over tighten.

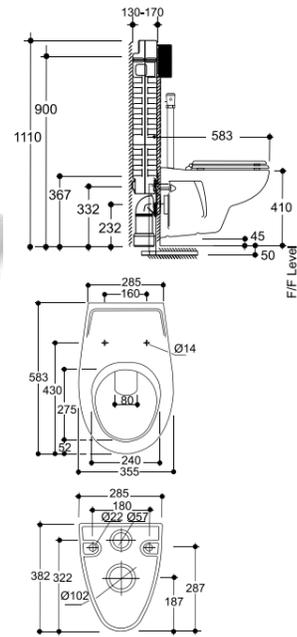

ORCHID BI
WALL HUNG PAN

439016WH
CORPBENN-2C00373
6005826064292

Back inlet open rim pan. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS


1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes. Detailed installation instructions supplied with bracket.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
3. Place pan into position, tighten nuts and place c.p. dome cover nuts.



COMPLIMENTARY PRODUCT

1. **8531Z000**
Jazz Thermostet seat

4. Complete plumbing and flush the water line.
5. Flush test to ensure that all connections are watertight.
NOTE: Do not over tighten.

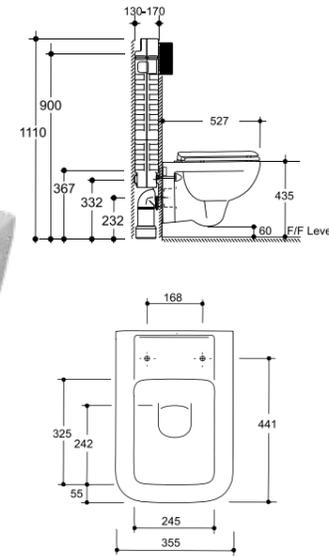

URBAN LIFE RIMLESS
WALL HUNG PAN

439400WH
CURB50WH-2C00377
6005826060935

Back inlet Rimless pan with thermostet soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS


1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
3. Place pan into position, tighten nuts and place c.p. dome cover over nuts.
NOTE: Do not over tighten.



SPARES FOR PRODUCT

1. **4393Z100**
Urban Life / Charisma seat
2. **8852Z100**
Entice seat hinge x 2

4. Flush the water line then fit double flap seat.
5. Complete all plumbing connections and test flush to ensure all connections are watertight.
NOTE: Do not over tighten.

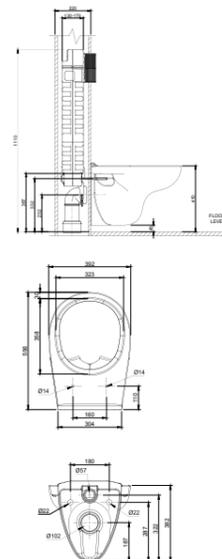

ORCHID 550 BI
WALL HUNG PAN

439550WH
CORBCCNN-2C00413
60058267026

Back inlet closed rim pan. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS


1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes. Detailed installation instructions supplied with bracket.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
3. Place pan into position, tighten nuts and place c.p. dome cover nuts.



COMPLIMENTARY PRODUCT

1. **8530Z000**
Embassy seat

4. Complete plumbing and flush the water line.
5. Flush test to ensure that all connections are watertight.
NOTE: Do not over tighten.

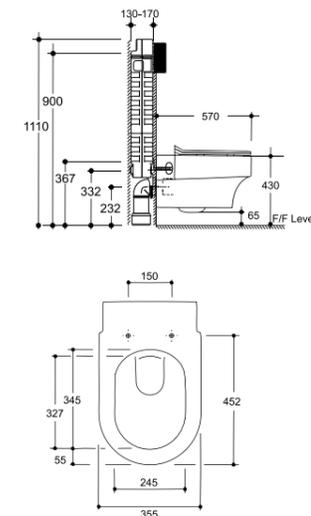

XTACY
WALL HUNG PAN

439200WH
CXTP50WH-2C00377
6005826060256

Back inlet closed rim pan and thermostet soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS

1. Determine pan height, prepare water inlet and outlet heights and adjust threaded rods to height of pan fixing holes.
2. Fit floor bracket into recessed wall and floor, then complete brickwork. Alternatively complete brickwork then fit bolt-through-the-wall bracket.
Threaded rods to protrude minimum 90mm from the finished wall surface.
3. Place washers and nuts on to edge of threaded rods.



SPARES FOR PRODUCT

1. **8523Z100**
Entice slimline seat
2. **8852Z100**
Entice seat hinge x 2

4. Place pan into position. Locate slotted bushes on to rods, between back of pan and washer and nut. Tighten nuts.
5. Flush the water line.
6. Fit double flap seat.
7. Complete all plumbing connections and test flush to ensure all connections are watertight.
NOTE: Do not over tighten.



FLOOR FIXING
FLOOR MOUNTED PAN BRACKETS

8447Z000
MZ005874
600582606111

Plastic floor fixing bracket set including 4 screws, 2 plugs and 2 caps



COMPLIMENTARY PRODUCTS

- 773862WH
Concorde 2 cc
- 772663WH
Entice cc
- 772660WH
Ingenu cc
- 772662WH
Refine cc
- 772562WH
Urban Compact cc
- 431300WH
Entice Rimless BTW pan
- 431200WH
Refine BTW pan



FLOOR BRACKET
WALL HUNG PAN BRACKET

8082Z000
MZ005529
6005826041033

Mild steel galvanised gold floor bracket with 125mm long threaded rods for use in 115mm, 230mm and dry wall applications.



COMPLIMENTARY PRODUCTS

- 439016WH
Orchid bi wall hung pan
- 439100WH
Orchid ti wall hung pan
- 439550WH
Orchid 550 bi wall hung pan
- 439500WH
Energy wall hung pan
- 439600WH
Entice wall hung pan
- 439900WH
Refine wall hung pan
- 439400WH
Urban Life Rimless wall hung pan
- 439200WH
Xtacy wall hung pan



BOLT-THROUGH-THE-WALL BRACKET
WALL HUNG PAN BRACKET

8084Z000
MZ005531
6005826041040

Mild steel galvanised gold bolt-through-the-wall bracket with 325mm long threaded rods for use in 230mm wall applications.



COMPLIMENTARY PRODUCTS

- 439016WH
Orchid bi wall hung pan
- 439100WH
Orchid ti wall hung pan
- 439550WH
Orchid 550 bi wall hung pan
- 439500WH
Energy wall hung pan
- 439600WH
Entice wall hung pan
- 439900WH
Refine wall hung pan
- 439400WH
Urban Life Rimless wall hung pan
- 439200WH
Xtacy wall hung pan



CONVERSION BRACKET
WALL HUNG PAN BRACKET


8078Z000
MZ005527
6005826041026

Mild steel galvanised gold floor bracket with 125mm long threaded rods for use in 115mm, 230mm and dry wall applications.



COMPLIMENTARY PRODUCTS

- 439016WH
Orchid bi wall hung pan
- 439100WH
Orchid ti wall hung pan
- 439550WH
Orchid 550 bi wall hung pan
- 439500WH
Energy wall hung pan
- 439600WH
Entice wall hung pan
- 439900WH
Refine wall hung pan
- 439400WH
Urban Life Rimless wall hung pan
- 439200WH
Xtacy wall hung pan

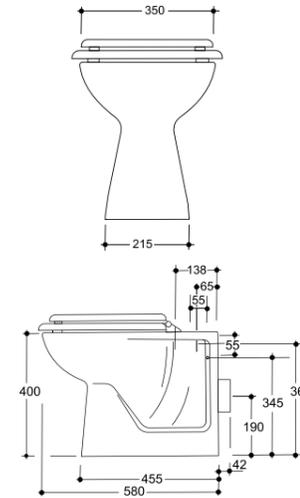

PARKTOWN
TOP INLET BACK TO WALL PAN

431500WH
CPAPTINN-2C00422
6005826001952

Back inlet closed rim pan. Compatible with exposed flush valve. Designed to flush effectively on 6L. Fixed to the wall with 2 x 6mm fixing screws.


INSTALLATION INSTRUCTIONS

- Ensure plumbing is in correct position.
- Place pan into position and mark hole positions on wall. Remove pan and drill holes. Place pan back into position, fix screw to the wall and secure.
- Flush the water line.
- Complete all plumbing connections and test flush.



COMPLIMENTARY PRODUCTS

- 8531Z000
Jazz Theroset seat
- 8513Z000
Fixing screws
- Cobra FM1.210
Flush valve

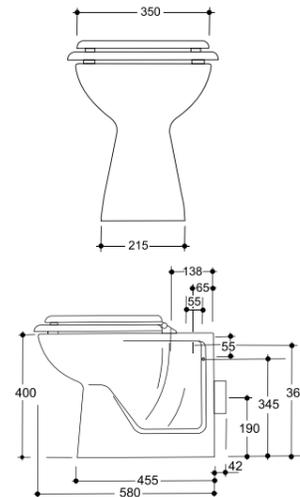

PARKTOWN
BACK INLET PAN

431600WH
CPAPBEP-2CO
6005826001945

Back inlet closed rim pan. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L. Fixed to the wall with 2 x 6mm fixing screws.

INSTALLATION INSTRUCTIONS


- Ensure plumbing is in correct position.
- Place pan into position and mark hole positions on wall. Remove pan and drill holes. Place pan back into position, fix screw to the wall and secure.
- Flush the water line.
- Complete all plumbing connections and test flush.



COMPLIMENTARY PRODUCTS

- 8531Z0
Jazz Theroset seat
- 8513Z000
Fixing screws

- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

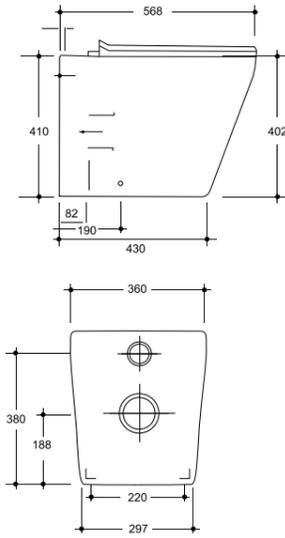

**ENTICE RIMLESS
BACK TO WALL PAN**

431300WH
CENTWHPA-2C00372
6005826060898

Back inlet rimless pan and thermoset soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 4.5L

INSTALLATION INSTRUCTIONS


1. Prepare water inlet and outlet heights and ensure plumbing is in correct position.
2. Attach brackets to the floor. Place pan into position to ensure that brackets are in correct position. Remove pan and apply thin layer of silicone sealant to floor surface. Place pan back into position and fix screw to the bracket.
3. Flush the water line.
4. Fit double flap seat.



SPARES FOR PRODUCT

1. **8523Z100**
Entice slimline seat
2. **8852Z100**
Entice seat hinge x 2
3. **8447Z000**
Pan floor mounting bracket

5. Complete all plumbing connections and test flush.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

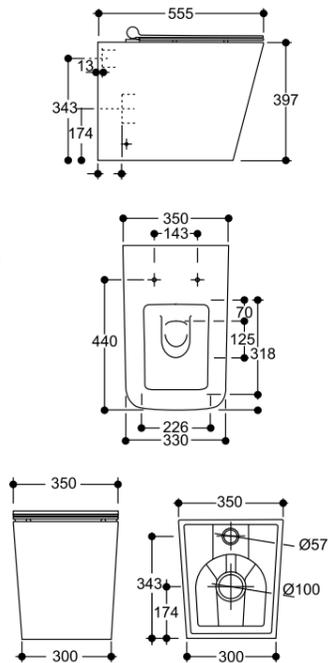

**REFINE
BACK TO WALL PAN**

431200WH
CREBTWNN-2C00372
6005826062144

Back inlet closed rim pan and thermoset soft close seat. Compatible with concealed cistern, duct cistern or concealed flush valve. Designed to flush effectively on 6/3L.

INSTALLATION INSTRUCTIONS

1. Prepare water inlet and outlet heights and ensure plumbing is in correct position.
2. Attach brackets to the floor. Place pan into position to ensure that brackets are in correct position. Remove pan and apply thin layer of silicone sealant to floor surface. Place pan back into position and fix screw to the bracket.
3. Flush the water line.
4. Fit double flap seat.



SPARES FOR PRODUCT

1. **7128Z000**
Refine seat
2. **8852Z100**
Entice seat hinge x 2
3. **8447Z000**
Pan floor mounting bracket

5. Complete all plumbing connections and test flush.
6. Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.






URINALS



03

Lavatera BI	73
Lavatera TI	73
Lavatera waterless	73
Sweetpea BI	74
Sweetpea TI	74
Sweetpea waterless	74
Flatback	75
Flatback waterless	75
Urinal division	75



**LAVATERA BI
URINAL**

705427WH
CLVURJBI2C00413B
6005826061031

Back inlet wall hung urinal, supplied with 38mm CP domical grating, back inlet spreader and 2 hanger brackets.

INSTALLATION INSTRUCTIONS

The Lavatera urinal can be installed using either:

- a) Concealed (back inlet) flushvalve (Cobra FJ8.102 or equivalent).
- b) Electronic back inlet valve (Cobra EL-3005 or equivalent). 1. Fit the waste outlet and spreader to the urinal.




1. Fit the waste outlet and spreader to the urinal.
2. Screw hanger brackets to the wall at the required height using rawl plugs.
3. Hang urinal on brackets and connect



SPARES FOR PRODUCT

1. **705400WH**
Lavatera urinal
 2. **70542200**
Lavatera BI fittings
- trap to waste outlet.
4. Connect urinal flushvalve to flush pipe which is connected to spreader, ensuring rubber grommet is correctly fitted.
 5. Test flush.

When installed next to each other, the recommended distance apart, centre to centre is 700mm.



**LAVATERA TI
URINAL**

705426WH
CLVURCUR2COB
6005826072365

Top inlet wall hung urinal, supplied with 38mm CP domical grating, top inlet spreader and 2 hanger brackets.

INSTALLATION INSTRUCTIONS

The Lavatera urinal can be installed using either:

- a) Exposed (top-inlet) flushvalve (FJ6000 Flushmaster or equivalent).
- b) Electronic top inlet valve (Cobra EL-3004 or equivalent).




1. Fit the waste outlet and spreader to the urinal.
2. Screw hanger brackets to the wall at the required height using rawl plugs.



SPARES FOR PRODUCT

1. **705400WH**
Lavatera urinal
 2. **70542100**
Lavatera TI fittings
3. Hang urinal on brackets and connect trap to waste outlet.
 4. Connect urinal flushvalve to flush pipe which is connected to spreader, ensuring rubber grommet is correctly fitted.
 5. Test flush.

When installed next to each other, the recommended distance apart, centre to centre is 700mm.



**LAVATERA
WATERLESS URINAL**

705428WH
CLVURCNN2C00414B
6005826050554

Wall hung urinal, supplied with waterless waste and 2 hanger brackets.

INSTALLATION INSTRUCTIONS

The waterless urinals can be installed as follows:


1. Fit the waterless waste to the urinal with Sikaflex.
2. Screw hanger brackets to the wall at the required height using rawl plugs.
3. Hang urinal on brackets.
4. No 'P' trap or bottle trap required. The 50mm drainpipe is attached directly to the socket.



SPARES FOR PRODUCT

1. **705400WH**
Lavatera urinal
2. **60651233**
Eco Smellstop waste
3. **80752000**
Replacement Waterless valve

When installed next to each other, the recommended distance apart, centre to centre is 700mm.

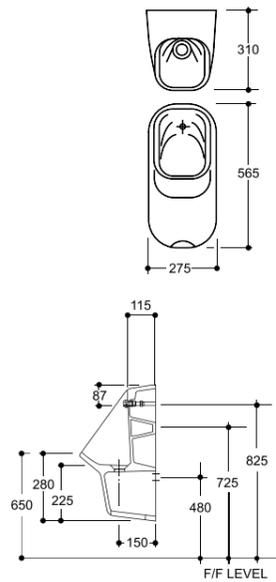

SWEETPEA BI URINAL

705127WH
CSWUBENN-2C00413
6005826021974

Back inlet wall hung urinal, supplied with 38mm CP domical grating, back inlet spreader and 2 hanger brackets.

INSTALLATION INSTRUCTIONS

The Sweetpea urinal can be installed using either:

- a) Concealed (back inlet) flushvalve (Cobra FJ8.102 or equivalent).
- b) Electronic back inlet valve (Cobra EL-3005 or equivalent).


1. Fit the waste outlet and spreader to the urinal.
2. Screw hanger brackets to the wall at the required height using rawl plugs.
3. Connect trap to sewer outlet then hang urinal on brackets and connect trap to waste outlet.

SPARES FOR PRODUCT

1. 705100WH Sweetpea BI urinal
2. 7054Z200 Lavatera BI fittings

4. Connect urinal flushvalve to flush pipe which is connected to spreader, ensuring rubber grommet is correctly fitted.
5. Test flush.

When installed next to each other, the recommended distance apart, centre to centre is 700mm.

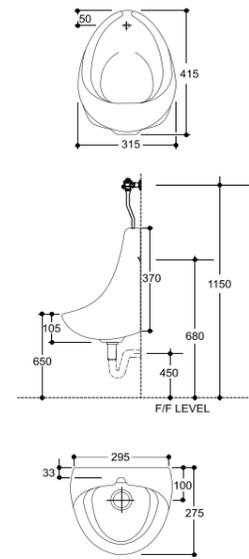

FLATBACK URINAL

705326WH
CFLUR0NN-2C00422
6005826001006

Top inlet wall hung urinal, supplied with 38mm CP domical grating, top inlet spreader and 2 hanger brackets.

INSTALLATION INSTRUCTIONS

The Flatback urinal can be installed using either:

- a) Exposed top inlet flushvalve (Cobra FJ6000 Flushmaster or equivalent with FJT 5.5 flushpipe).
- b) Electronic top inlet flushvalve (Cobra EL-3004 or equivalent).


1. Fit the waste outlet and spreader to the urinal.

SPARES FOR PRODUCT

1. 705300WH Flatback urinal
2. 7053Z000 Flatback fittings

2. Screw hanger brackets to the wall at the required height using rawl plugs.
3. Hang urinal on brackets and connect trap to waste outlet.
4. Connect urinal flushvalve to flush pipe which is connected to spreader.
5. Test flush.

When installed next to each other, the recommended distance apart, centre to centre is 700mm.

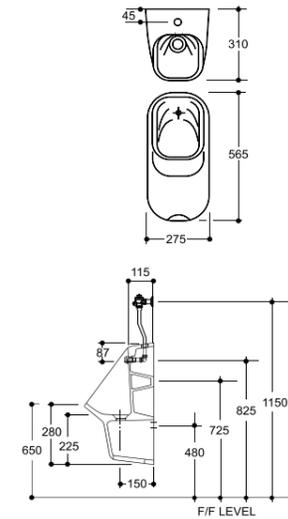

SWEETPEA TI URINAL

705126WH
CSWURJUR2C00362B
6005826013795

Top inlet wall hung urinal, supplied with 38mm CP domical grating, top inlet spreader including 15/15 elbow and plastic CP ring and 2 hanger brackets.

INSTALLATION INSTRUCTIONS

The Sweetpea urinal can be installed using either:

- a) Exposed (top-inlet) flushvalve (Cobra FJ6000 Flushmaster or equivalent with FJT 5.5 flushpipe).
- b) Electronic top inlet valve (Cobra EL-3004 or equivalent).


1. Fit the waste outlet and spreader to the urinal.
2. Screw hanger brackets to the wall at the required height using rawl plugs.

SPARES FOR PRODUCT

1. 705000WH Sweetpea TI urinal
2. 7054Z000 Sweetpea TI fittings

3. Connect trap to sewer outlet then hang urinal on brackets and connect trap to waste outlet.
4. Connect urinal flushvalve to flush pipe which is connected to spreader, ensuring rubber grommet is correctly fitted.
5. Test flush.

When installed next to each other, the recommended distance apart, centre to centre is 700mm.

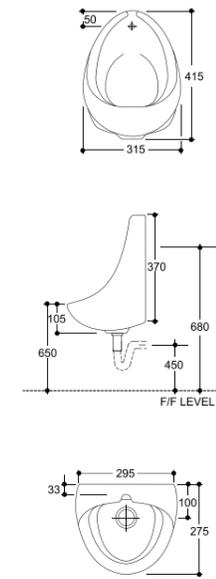

FLATBACK WATERLESS URINAL

705327WH
CFBWURUR-2C0
6005826050578

Wall hung urinal, supplied with waterless waste and 2 hanger brackets.

INSTALLATION INSTRUCTIONS


The waterless urinals can be installed as follows:

1. Fit the waterless waste to the urinal with Sikaflex.
2. Screw hanger brackets to the wall at the required height using rawl plugs.
3. Hang urinal on brackets.
4. No 'P' trap or bottle trap required. The 50mm drainpipe is attached directly to the socket.

SPARES FOR PRODUCT

1. 705300WH Flatback urinal
2. 60651233 Eco Smellstop waste
3. 8075Z000 Replacement Waterless valve

When installed next to each other, the recommended distance apart, centre to centre is 700mm.

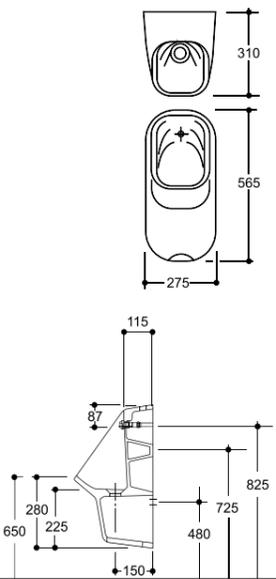

SWEETPEA WATERLESS URINAL

705027WH
CSWURNN2C00414B
6005826050561

Wall hung urinal, supplied with waterless waste and 2 hanger brackets.

INSTALLATION INSTRUCTIONS


The waterless urinals can be installed as follows:

1. Fit the waterless waste to the urinal with Sikaflex.
2. Screw hanger brackets to the wall at the required height using rawl plugs.
3. Hang urinal on brackets.
4. No 'P' trap or bottle trap required. The 50mm drainpipe is attached directly to the socket.

SPARES FOR PRODUCT

1. 705100WH Sweetpea BI urinal
2. 60651233 Eco Smellstop waste
3. 8075Z000 Replacement Waterless valve

When installed next to each other, the recommended distance apart, centre to centre is 700mm.

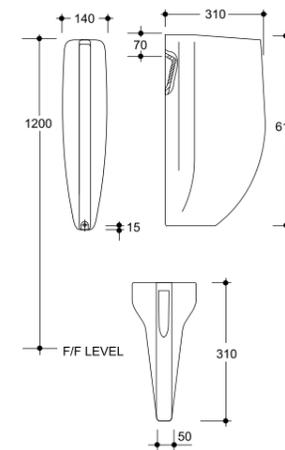

URINAL DIVISION URINAL DIVISION

705228WH
CCLUD0CO-2C00413
6005826069341

Wall hung urinal division, supplied with screw and 1 hanger bracket.

INSTALLATION INSTRUCTIONS

1. Drill fixing holes at correct height, and fit hanger bracket.
2. Place division on fixing bracket, level against wall surface and, mark fixing hole position at bottom of division.
3. Remove division, drill hole and insert plug.

4. Fit division onto hanger bracket, and attach screw.




HOSPITAL & LABORATORY

04

Hygia Boxed C/W fittings	78
Sola 510	78
Sola 630	79
Lab sink 450	79
Lab sink 600	80
Drip sink	80
Slophopper	81



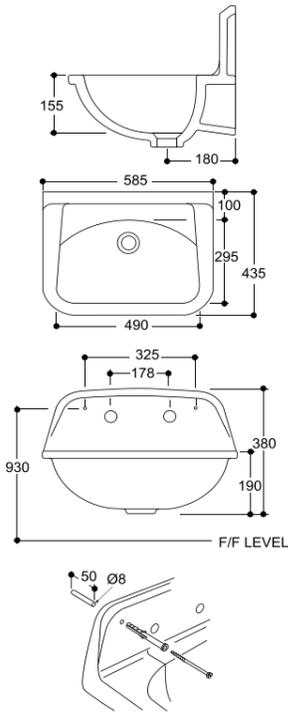

**HYGIA BOXED C/W FITTINGS
MEDICAL BASIN**

703600WH
CHYBABI-2CO
6005826060836

585x435mm wall hung medical basin with 2 tapholes, supplied with 1/4 turn wrist action mixer, CP waste, standing overflow tube, 2 fixing screws, plugs and CP caps.

INSTALLATION INSTRUCTIONS

1. Determine position where basin is to be installed.
2. Mark position of holes to be drilled for fixing screws.
3. Drill holes to correct size and depth.
4. Place basin against holes for push-through installation for concrete, solid bricks and hollow blocks.
5. Insert screws and tighten with number 10 hexagonal spanner.
6. Press the c.p. caps onto head of screw and over the exposed section of the plug

COMPLIMENTARY PRODUCT

1. 308
32mm basin waste, unslotted
2. 340
CP Bottle trap

SPARES FOR PRODUCT


1. 703602WH
Hygia basin
2. 515/055H-21
Medical mixer
3. 8630Z000
CP standing overflow tube
4. 8513Z000
Hygia fixing screw set

INSTALLATION INSTRUCTIONS

up against basin splashback.
NOTE: Maximum load bearing capacity of the fixing is achieved only if the screw projects through the plug tip by at least 1 x screw diameter, and the plug expands in the wall with its whole anchoring depth. Tiles and plaster are considered to be non-load bearing.

SPECIAL RECOMMENDATION

Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

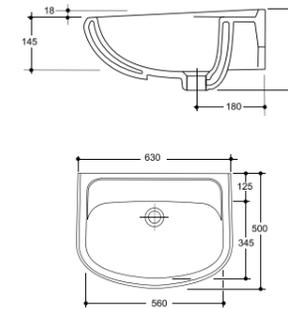

**SOLA 630
MEDICAL BASIN**

702800WH
CS063JNN-2C00413
6005826069037

630x500mm wall hung rectangular medical basin with no tapholes, integrated overflow or chainstay hole.

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

1. Bolted to the wall using two 10 mm bolts [code 8448Z0].
or
2. Using a concealed wall bracket [code 8131Z3], and three 10 mm bolts [code 8448Z0].

Option 1:
Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin, and secure. NOTE: Do not over tighten.


COMPLIMENTARY PRODUCT

1. 8448Z000
10mm fixing bolt set
2. 8131Z300
Sola/Weaver basin bracket
3. 308
32mm basin waste unslotted
4. 340
CP Bottle trap
5. 8630Z000
CP standing overflow tube

Option 2:
Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Loosely attach concealed bracket to basin waste. Attach bolts to wall, fit basin and secure bracket to basin waste.

SPECIAL RECOMMENDATION

Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

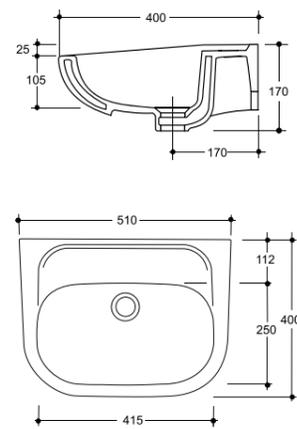

**SOLA 510
MEDICAL BASIN**

703700WH
CS051JNN-2C00413
6005826002461

510x400mm wall hung semi-rectangular medical basin with no tapholes, integrated overflow or chainstay hole.

INSTALLATION INSTRUCTIONS

The basin may be installed by alternative methods:

1. Bolted to the wall using two 10 mm bolts [code 8448Z0].
or
2. Using a concealed wall bracket [code 8131Z3], and three 10 mm bolts [code 8448Z0].

Option 1:
Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Attach bolts to wall, fit basin, and

COMPLIMENTARY PRODUCT


1. 8448Z000
10mm fixing bolt set
2. 8131Z300
Sola/Weaver basin bracket
3. 308
32mm basin waste unslotted
4. 340
CP Bottle trap
5. 8630Z000
CP standing overflow tube

INSTALLATION INSTRUCTIONS

secure. NOTE: Do not over tighten.
Option 2:
Place basin level against finished wall surface at correct height and mark fixing hole positions. Remove basin and drill holes. Loosely attach concealed bracket to basin waste. Attach bolts to wall, fit basin and secure bracket to basin waste.

SPECIAL RECOMMENDATION

Always use silicone sealant or equivalent between basin and finished wall surface area for secure and neat installation.

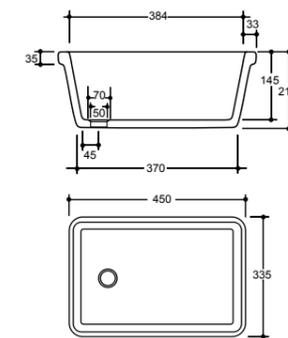

**LAB SINK 450
LABORATORY SINK**

234501WH
CLA43J43-2C00344
6005826002454

450 x 335 x 180mm rectangular sink with centre end waste outlet and no integrated overflow.

INSTALLATION INSTRUCTIONS

Sink may be installed by alternative methods:

1. Fitted to the wall on two semi-concealed brackets [code 8102Z000]
or
2. Fixed underneath a slab using two adjustable underslung brackets [code 8109Z000]


Option 1:
Position brackets and mark fixing holes. Fix brackets to wall and place sink into position. Always use silicone sealant or equivalent between the brackets and the underside of the sink for a secure and neat installation.

COMPLIMENTARY PRODUCTS

1. 8790Z000
38mm Acid resistant waste
2. 8794Z000
32mm CP waste
3. 8102Z000
Wall hung Sink brackets x2
4. 8109Z000
Under mount sink brackets x2

Option 2:
Position sink under rectangular cut-out of slab ensuring that overhang is even all round (±10 mm). With sink correctly positioned, mark hole positions of brackets. Remove sink and drill previously marked bracket screw holes. Attach bracket to slab. Apply a liberal layer of silicone sealant or equivalent to contact area of sink rim and slab. Tighten securing stud so as to ensure a watertight seal between sink and underside of slab. Wipe off excess sealant and allow to dry.



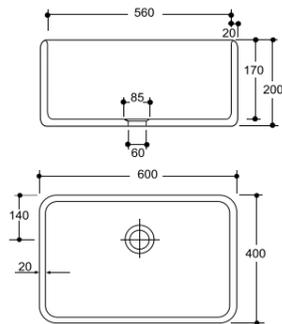

LAB SINK 600
LABORATORY SINK

236100WH
CLA60JNN-2C00401
6005826002447

600mm x 400mm x 200mm rectangular sink with centre back waste outlet and no integrated overflow.

COMPLIMENTARY PRODUCT

- 8791Z000**
38mm Acid resistant waste
- 8783Z000**
38mm CP waste
- 8102Z000**
Wall hung Sink brackets x2
- 8109Z000**
Under mount sink brackets x2

INSTALLATION INSTRUCTIONS

Sink may be installed by alternative methods:

- Fitted to the wall on two semi-concealed brackets (code 8102Z000) or
- Fixed underneath a slab using two adjustable underlugs brackets (code 8109Z000)

Option 1:
Position brackets and mark fixing holes. Fix brackets to wall and place sink into position. Always use silicone sealant or equivalent between the brackets and the

underside of the sink for a secure and neat installation.

Option 2:
Position sink under rectangular cut-out of slab ensuring that overhang is even all round (± 10 mm). With sink correctly positioned, mark hole positions of brackets. Remove sink and drill previously marked bracket screw holes. Attach bracket to slab. Apply a liberal layer of silicone sealant or equivalent to contact area of sink rim and slab. Tighten securing stud so as to ensure a watertight seal between sink and underside of slab. Wipe off excess sealant and allow to dry.



SLOP HOPPER
SLOPHOPPER COMBINATION

751599WH
CKLPAJNN2C00413B
6005826018035


405mm x 530mm x 360mm 104° outlet pan, complete with resin pads, CP bucket grating and PVC junction pan connector, rectangular 600mmx400mmx200mm sink with 38mm CP waste, PVC bottle trap and waste pipe, 605mmx400mm Drainer, 11L high level cistern with fittings and chain.

COMPLIMENTARY PRODUCTS

- 518-21**
CP 13mm mixer
- 751500WH**
Slop hopper pan with grid
- 2510Z000**
Hospital grid
- 7102HLWH**
Protea High Level Cistern
- 236100WH**
Lab sink
- 146100WH**
Drainer
- 8106Z000**
Hospital Brackets x4
- 8123Z000**
Levelling plates x2
- 8124Z000**
Outlet levelling plates x2
- 1710Z200**
CP flushpipe and holderbat

INSTALLATION INSTRUCTIONS

- Ensure water connections are available for mixer, correctly positioned.
- Place slop hopper into position and mark hole positions. Remove slop hopper and drill holes. Place slop hopper back into position, fix screw to the floor and secure.
- Position brackets and mark fixing holes for sink and drainer.
- Fix brackets to wall and attach levelling plates, then position sink and drainer onto brackets.
- Always use silicone sealant or equivalent between the brackets and the underside of the ware for a secure and neat installation.
- Assemble the cistern, determine the height and fix to wall. Cut the flushpipe to length and connect it to the elbow with Pratley Steel or equivalent, then connect the flushpipe from the cistern to the pan.
- Cut sink waste to length and connect.
- Complete all plumbing connections, test flush, ensure that correct water level has been set.
- Always use silicone sealant or equivalent between the pan and the finished floor and wall surfaces for a secure and neat installation.
NOTE: The warranty will not apply to any product installed with cement.

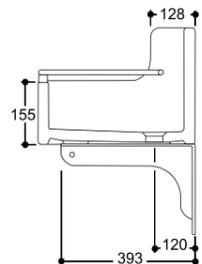

DRIP SINK
DRIP SINK

238013WH
CDR53053-2C0
6005826061024

540mm x 460mm x 180mm rectangular Drip Sink with resin pad and CP bucket grating with rubber stops.

COMPLIMENTARY PRODUCT



- 8783Z000**
38mm CP waste
 - 8102Z000**
Wall hung Sink brackets x2
- SPARES FOR PRODUCT**
- 238000WH**
Drip Sink
 - 2380Z000**
Drip sink fitting

INSTALLATION INSTRUCTIONS

Position brackets and mark for fixing holes. Fix brackets to wall and place sink into position. Always use silicone sealant or equivalent between the brackets and the underside of the sink for a secure and neat installation. Complete all plumbing connections.

SPARES FOR PRODUCT

- 238000WH**
Drip Sink
- 2380Z000**
Drip sink fitting

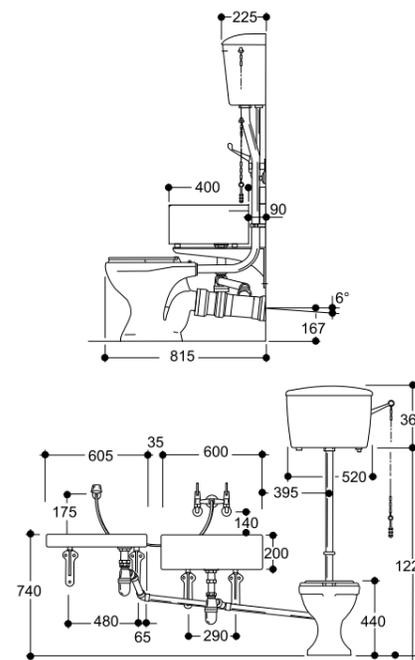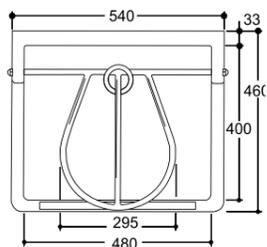

Corner of Lilly and
Morris Street,
Meyerton, Gauteng,
South Africa

Telephone Number: +27 (0) 16 360 6000
National After Sales Service Number: +27 (0) 861 21 21 21

ONLINE PLATFORMS

Visit our websites and find an office/dealer/distributor closest to you.

Websites:

<http://www.lixil.co.za/>

Social Media:

 - @VaalSanitaryware

Vaal has a policy of continuous product development and advancements and therefore reserves the right to modify product specifications accordingly.

Vaal
SANITARYWARE